

**Specifications:**

**Material And Finish:**

Insulator: Nylon 66 UL94V-0 Color: Beige  
 Contact: Brass  
 Plated: Tin 100u"~150u" Plated, Over Nickel  
 30u"~50u'Plated

**Rating:**

Current Rating: 25A AC,DC  
 Voltage Rating: 250V AC,DC  
 Operating Temperature Range: -25~+85°C

**Electrical:**


Contact resistance: 20m Ohm Max  
 Insulator resistance: 1000M ohm min.  
 Withstanding Voltage: 1500V AC/Minute

**Ordering Information**








**A8902R-06Q-01-X**

1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — Q: Tin Plated
- 5: — A: In Bag  
 B: In Tube  
 C: In Tray



P. C. B LAYOUT

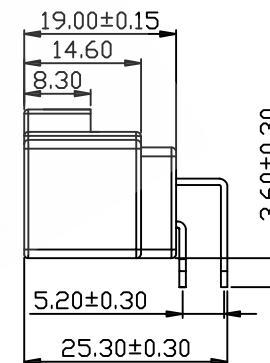

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A8902R-06Q-01-X
4X				Samson	LINEAR	ANGLES	DWG. NO.:
3X				CHKD.:	X.:	X.:	TITLE :
2X	Update The Drawing	Samson	2015-9-7	Tony	X.X: ±0.25	X.X.:	8.90mm Wafer 90° Type
1X	ORIGINAL	Kenry		APPD.:	X.XX: ±0.20	X.XX.:	DATE: 17-May-2014
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX.:	

**HJBRIGHT** 東莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
 SCALE: 1:1  
 UNIT: mm

THIRD ANGLE PROJECTION

**A4**