

Specifications:

Material And Finish:

Insulator: Nylon 66 UL94V-0 Color:Black
 Contact: Brass
 Plated: Tin 100u"~150u" Plated, Over Nickel
 30u"~50u'Plated

Rating:

Current Rating: 25A AC,DC
 Voltage Rating: 250V AC,DC
 Operating Temperature Range: -25~+85°C

Electrical:


Contact resistance: 20m Ohm Max
 Insulator resistance: 1000M ohm min.
 Withstanding Voltage: 1500V AC/Minute

Ordering Information








A8902R-06Q-03-X

1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — Q: Tin Plated
- 5: — A: In Bag
 B: In Tube
 C: In Tray



P. C. B LAYOUT

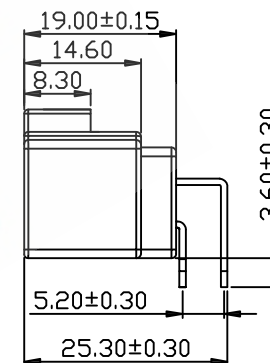

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : A8902R-06Q-03-X	
4X				Samson	LINEAR	ANGLES	DWG. NO.:	
3X				CHKD.:	X.:	X':	TITLE :	
2X				Tony	X.X: ±0.25	X.X':	8.90mm Wafer 90° Type	
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.20	X.XX':	DATE: 17-May-2014	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX':	UNIT: mm	

HJBRIGHT® 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4