
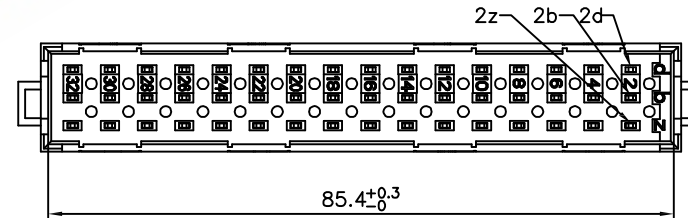
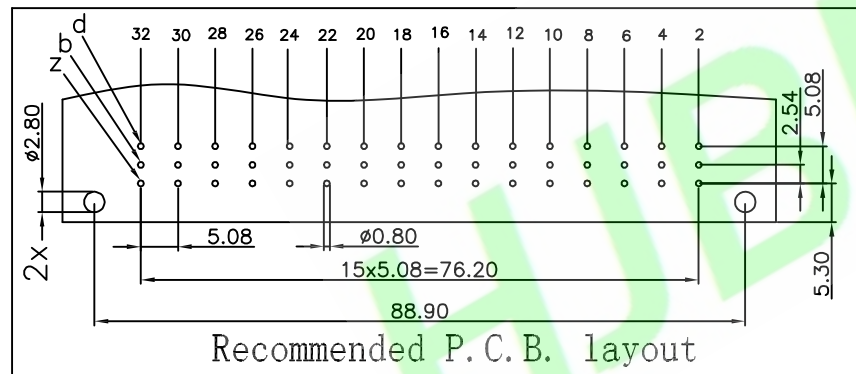

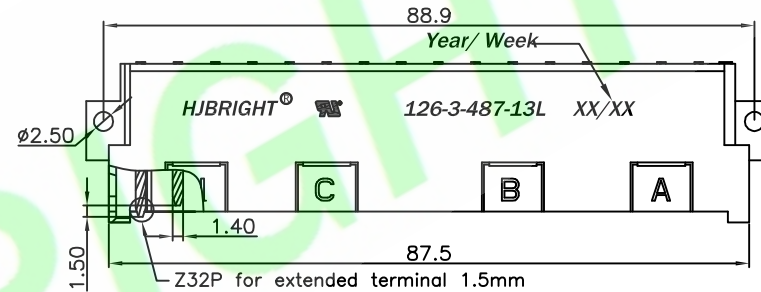


DIN 41612 EUROCARD CONNECTORS  
Right Angle Male Type F48 Connectors

Technical data

EURO DIN 41612  
Housing: PBT & 30%Glass Fiber(UL94V-0)  
Contact: Male : Brass  
Plating: 2U" Au plated on contact area,  
Tin plated on the tails

Operating temperature: -55°C~+115°C  
Contact resistance: 20m(ohm)max.  
Insulator resistance: 10<sup>6</sup> m(ohm)min.  
Current rating: 6 AMP  
Withstanding voltage: AC 1000V for 1 minute  
Insertion Force: 90N max  
Withdrawal Force: 0.15N min.per individual contact  
Contact Rating: Class 3  
RoHS Compliant

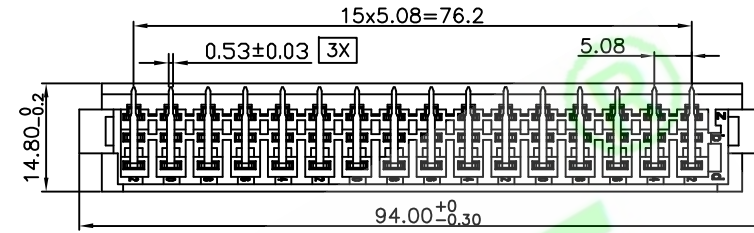

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 126-3-487-13L-10-Z32
4X				Zengdongming	LINEAR	ANGLES	DWG. NO.: RD0612-042
3X	增加焊脚.053±0.03尺寸管控	Aaron	20180516	CHKD.:	X.: ±0.30	X': ±3.0°	TITLE :
2X	for extended terminal 1.5mm	Zengdongming	2013.04.23	Tony	X.X: ±0.25	X.X': ±2.0°	DATE: 18-Dec-2008
1X	ORIGINAL	joan cheng		APPD.:	X.XX: ±0.15	X.XX': ±1.0°	
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.05	X.XXX':	

**HJBRIGHT** 东莞市华晶电子有限公司  
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
SCALE: 1:1  
UNIT: mm

THIRD ANGLE PROJECTION

**A4**