

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:





Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information

250112S-XXXXXX-X

1 2 3 4 5

- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — A: Gold Flash
 H: Selective Gold Plated
 Q: Tin Plated
- 5: — A: In bag
 B: In Tube

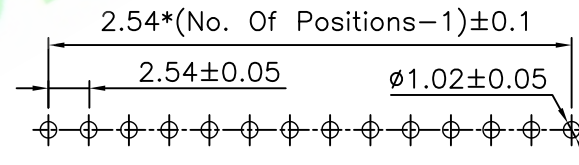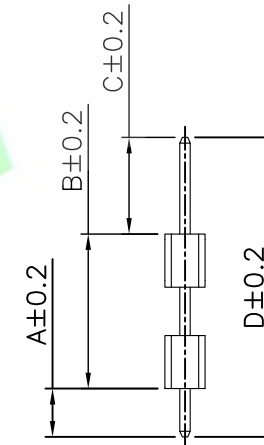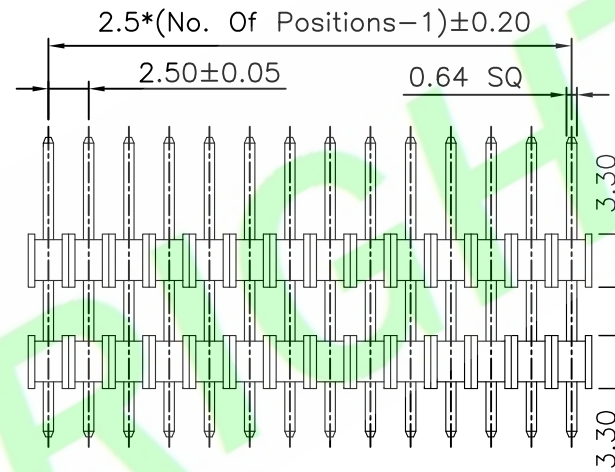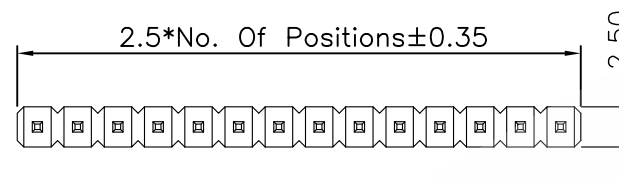

Recommended PCB Layout

RoHS Compliant

5X				DR.BY.: joy chen	GENERAL TOLERANCE:		PART NO : 250112S-XXXXXX-X
4X				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.: RD0805-123
3X				APPD.: Billy	X.: ±0.30	X': ±5.0°	TITLE : 2.50mm Pitch Pin Header Straight Type
2X	ORIGINAL	joy chen			X.X: ±0.20	X.X': ±3.0°	DATE: 24-May-2008
1X	DESCRIPTION	DR.BY	ECN. NO.		X.XX: ±0.15	X.XX': ±2.0°	
REV.					X.XXX: ±0.10	X.XXX': ±1.0°	

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4