

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information

25011M-XXXXXX-X

1 2 3 4 5

- 1: — Series No.
- 2: — M:SMT Type
- 3: — No. of Positions
- 4: — A:Gold Flash
Q:Matte Tin
- 5: — A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

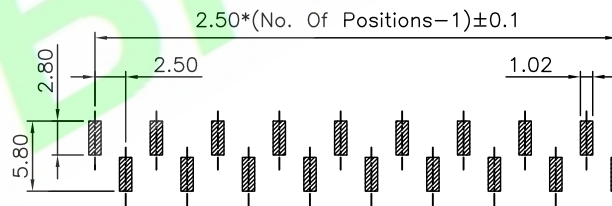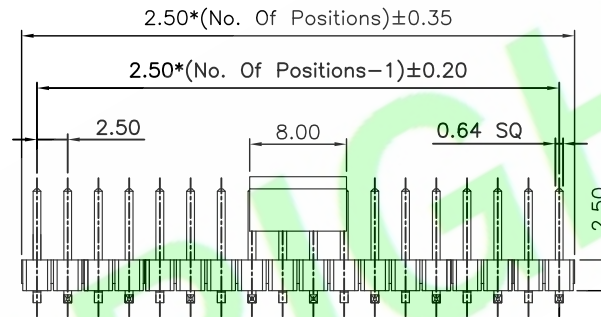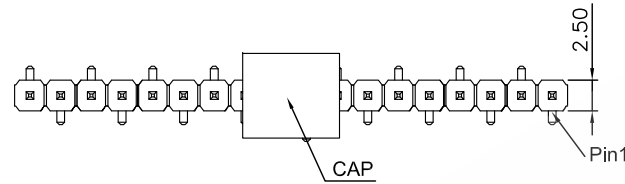

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : 25011M-XXXXXX-X		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED
4X				Samson	LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE :		SHEET: 1/1
2X				Tony	X.X: ±0.20	X.X': ±3.0°	2.50mm Pitch Pin Header SMT Type		SCALE: 1:1
1X	ORIGINAL	Samson		APPD.:	X.XX: ±0.15	X.XX': ±2.0°	DATE: 1-Jan-2014		UNIT: mm
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°			THIRD ANGLE PROJECTION

A4