


NOTES:  
 1. TERMINAL PULL FORCE TEST CONDITION:  
 12AWG-31.75 Kgf-cm(MIN)  
 18AWG-9.07 Kgf-cm(MIN)  
 24AWG-2.27 Kgf-cm(MIN)

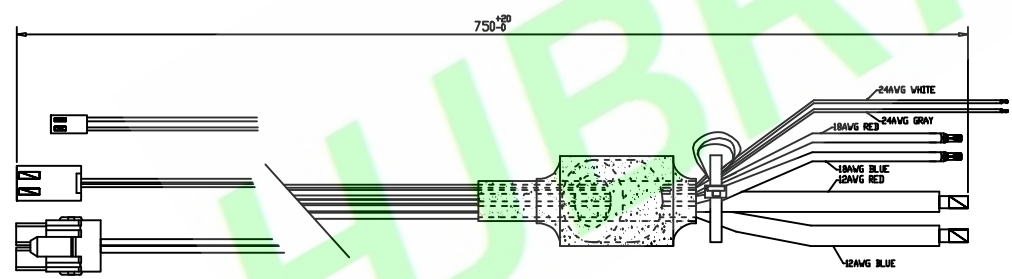

15	CONTACT		2
14	CONTACT		2
13	HOUSING		1
12	Heat-Shrinkable Tubing $\phi$ 20.0	BLACK	1
11	CORE FCX BEAD 3A4 16x8x16 KFTR 16816		1
10	Heat-Shrinkable Tubing $\phi$ 7.0	BLACK	1
9	CONTACT		2
8	WIRE UL1569 18AWG RED 105°C 300V	RED	
7	WIRE UL1569 18AWG BLUE 105°C 300V	BLUE	
6	WIRE UL1569 24AWG GRAY 105°C 300V	GRAY	
5	WIRE UL1569 24AWG WHITE 105°C 300V	WHITE	
4	CONTACT		2
3	HOUSING		1
2	CONTACT		2
1	HOUSING		1
Item	Description	Color	QTY

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : HJ-0931-0007-1080A1	
4X					LINEAR	ANGLES	DWG. NO.:	
3X				CHKD.: Tony	X.:	X':	TITLE :	
2X					X.X:	X.X':	DATE: 14-Aug-2017	
1X	ORIGINAL	Bruce		APPD.: Billy	X.XX:	X.XX':		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX:	X.XXX':		

**HJBRIGHT** 东莞市华晶电子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
 SCALE: 1:1  
 UNIT: mm

THIRD ANGLE PROJECTION

**A4**