

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC





Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

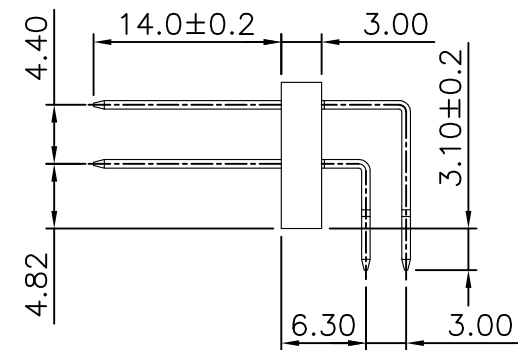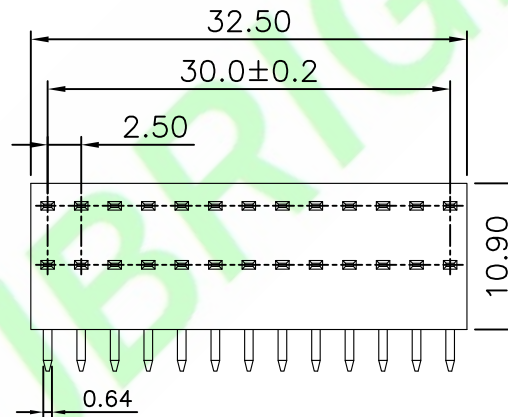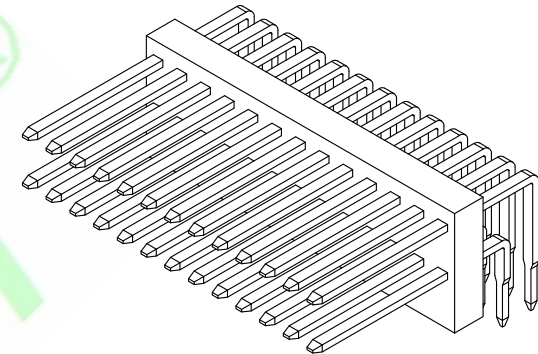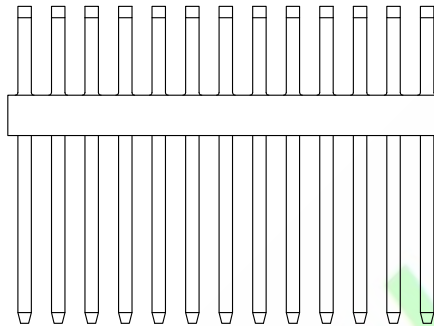

Ordering Information

25444R-26S352-NX

1 2 3 4 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — S:Matte Tin Plated
- 5: — A:In bag
B:In Tube
C:In Tray

5X				DR.BY.: Aaron	GENERAL TOLERANCE:		PART NO : 25444R-26S352-NX
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.50X4.40mm Pitch Pin Header R/A Type
2X					x.x: ±0.20	x.x': ±3.0°	
1X	ORIGINAL	Aaron		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 15-Aug-2009

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4