

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black
& PA6T UL94V-0 Color:Black

Contact:Brass
Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp
Voltage Rating:150V AC/DC
Operating Temperature Range:-40°~+105°C

Electrical:


Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:500V AC/Minute

Ordering Information

B2009S-XXX-01-XX

1 2 3 4 5 6

- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — A: Gold Flash
I: Gold 3u"
O: Gold 5u"
R: Gold 10u"
U: Gold 15u"
H: Selective Gold Plated
M: 15u" Gold on contact; Tin on tail
Q: Tin Plated
- 5: — N: PA6T UL94V-0
Blank: PBT UL94V-0
- 6: — A: In bag
B: In Tube
C: In Tray

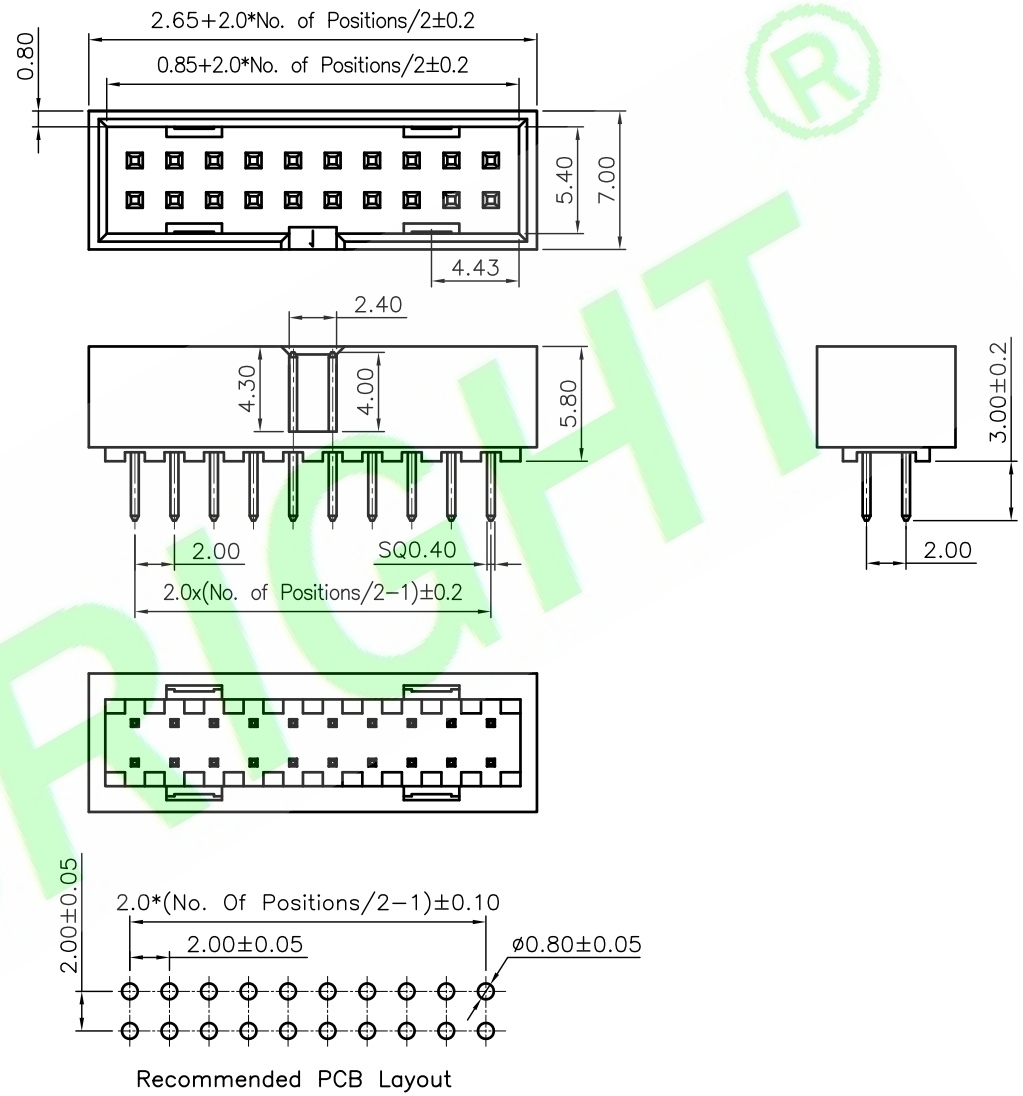

5X				DR.BY.: Tsw
4X				CHKD.: Ren
3X				APPD.: Billy
2X				
1X	ORIGINAL	Tsw		
REV.	DESCRIPTION	DR.BY	ECN. NO.	

GENERAL TOLERANCE:		PART NO : B2009S-XXX-01-XX	
LINEAR	ANGLES	DWG. NO.:	
X.: ±0.30	X': ±5.0°	TITLE : 2.0mm Pitch Box Header Straight Type	
X.X: ±0.20	X.X': ±3.0°	DATE: 4-AUG-2020	
X.XX: ±0.15	X.XX': ±2.0°		
X.XXX: ±0.10	X.XXX': ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4