

RoHS Compliant






Specifications:
 Material And Finish:
 Insulator:High Temperature Thermoplastic UL94V-0
 Color:See Ordering Information
 Contact:Copper Alloy
 Plated:See Ordering Information

Rating:
 Current Rating: 1.5mm Terminal 18A
 2.8mm Terminal 30A
 Voltage Rating:14VDC
 Operating Temperature Range: -40°C~105°C


Electrical:
 Contact resistance:1.5mm Terminal 10m Ohm Max
 2.8mm Terminal 5m Ohm Max
 Insulator resistance:20M Ohm min
 Withstanding Voltage:500V/DC

Ordering Information
A35007R-10X-XX-X
 1 2 3 4 5


- 1:— Series No.
- 2:— R:R/A Type
- 3:— S:Matte Tin Plated
Q:Tin Plated
- 4:— 01:A Type BLACK
02:B Type GREY
03:C Type BROWN
- 5:— B:In Tube
C:In Tray

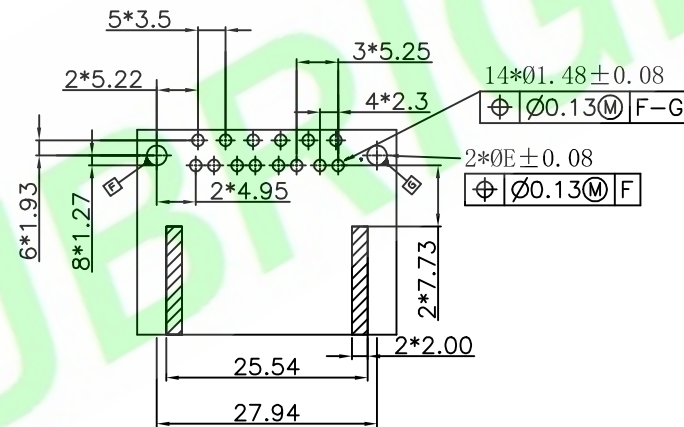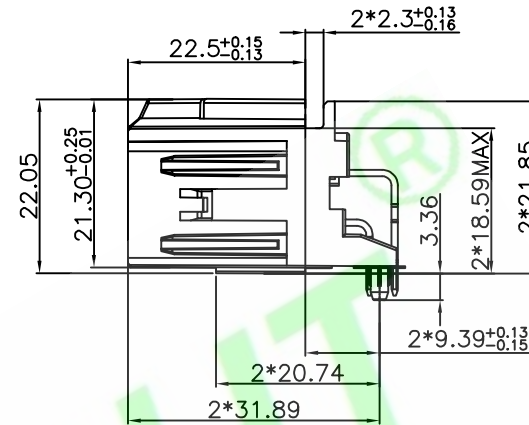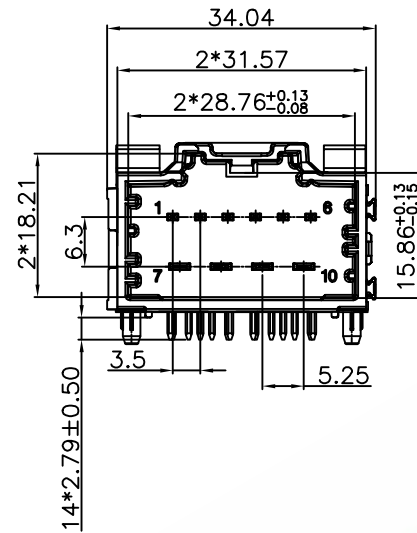


RECOMMENDED PCB LAYOUT

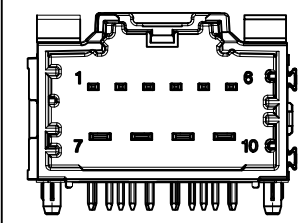

A Type BLACK



B Type GREY



C Type BROWN

5X				DR.BY.: Zolin	GENERAL TOLERANCE:	PART NO : A35007R-10X-XX-X
4X					LINEAR	DWG. NO.:
3X				CHKD.: Mark	x.: ±0.30	x': ±5.0'
2X					x.x: ±0.20	x.x': ±3.0'
1X	ORIGINAL	Zolin		APPD.: Billy	x.xx: ±0.15	x.xxx: ±2.0'
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0'

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

TITLE :
3.5mm Pitch Wafer R/A Type

DATE: 27-Nov-2022

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4