







Specifications:
 Material And Finish:
 Insulator:PBT UL94V-0 Color:Black
 Contact:Copper alloy
 Plated:See Ordering Information

Rating:
 Current Rating:16.0 Amp
 Voltage Rating:800V AC/DC
 Operating Temperature Range:-55~+105°C

Electrical:
 Contact resistance:10m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:2600V AC/Minute

Ordering Information
 A50002R-06X-XX-X
 1 2 3 4 5 6


- 1: Series No.
- 2: R/R/A Type
- 3: No. of Positions
- 4: A:Gold flash
Q:Tin Plated
S:Matte Tin Plated
M:15u" Gold on contact;Tin on tail
A2:30u" Gold on contact;Tin on tail
- 5: 01:A TYPE Black
02:B TYPE Grey
03:C TYPE Blue
04:D TYPE Brown
05:E TYPE White
- 6: A:In Bag
B:In Tube
C:In Tray
G:W/O Cap In Tape&Reel

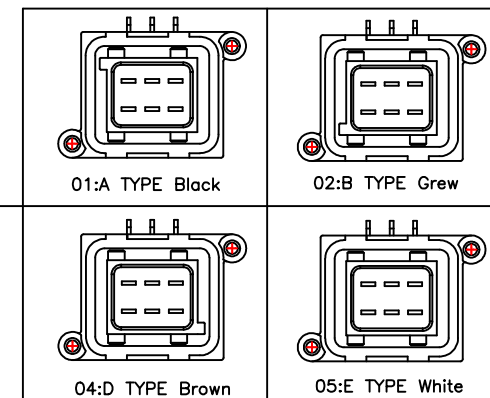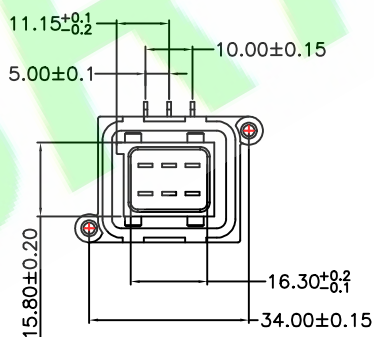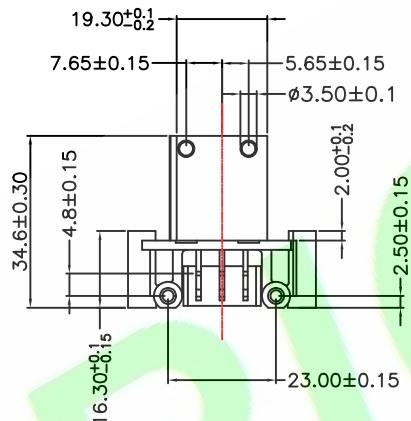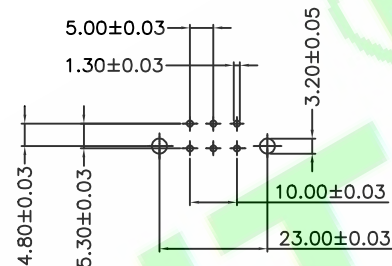

| | | | | | | | | |
|------|-------------|-------|----------|--------------|--------------------|---------------|----------------------------|--|
| 5X | | | | DR.BY: Wu | GENERAL TOLERANCE: | | PART NO : A50002R-06X-XX-X | |
| 4X | | | | | LINEAR | ANGLES | DWG. NO.: | |
| 3X | | | | CHKD: Aren | x.: ±0.40 | x': ±5.0° | TITLE : | |
| 2X | | | | | x.x: ±0.30 | x.x': ±3.0° | 5.0Pitch Wafer 6PIN | |
| 1X | ORIGINAL | Wu | | APPD.: Billy | x.xx: ±0.20 | x.xxx: ±2.0° | DATE: 2-Jan-2024 | |
| REV. | DESCRIPTION | DR.BY | ECN. NO. | | x.xxx: | x.xxx': ±1.0° | | |

HJBRIGHT 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm



A4