

Specifications:
 Material And Finish:
 Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information








Rating:
 Current Rating:5.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature
 Range:-40~+105°C

Electrical:
 Contact resistance:30m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1000V AC/Minute

Ordering Information

DC35001RF-XXX-01-X
 1 23 45 5

- 1: — Series No.
- 2: — R:R/A Type
- 3: — F:Female
- 4: — No. of Positions
- 5: — S:Matte Tin Plated
- 6: — A:In Bag
 B:In Tube
 C:In Tray
 G:Tape&Reel

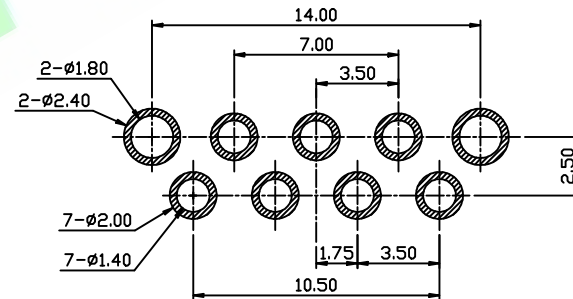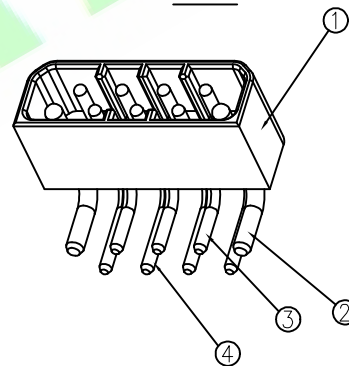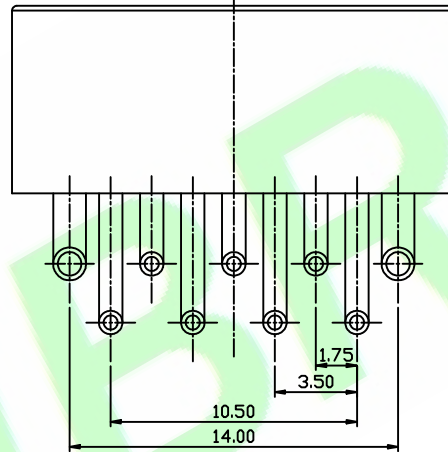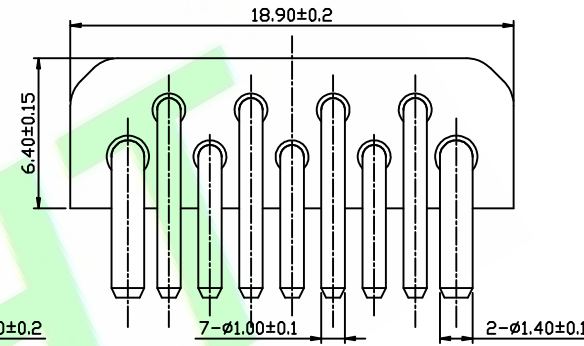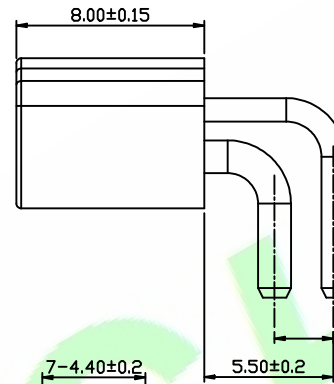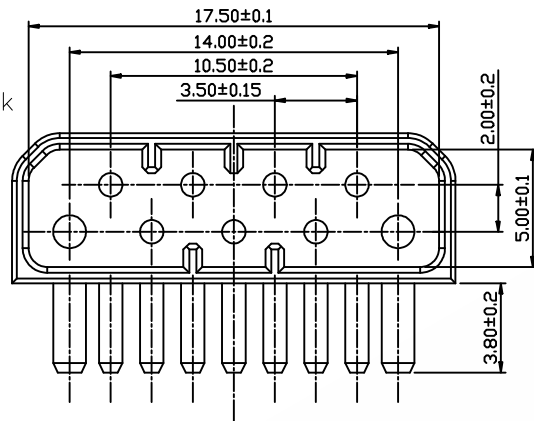

PCB LAYOUT (TOP VIEW)

Tolerance:±0.05mm

④	TERMINAL2	4	BRASS	Au 1u-3u",Ni 30-80u"
③	TERMINAL2	3	BRASS	Au 1u-3u",Ni 30-80u"
②	TERMINAL1	2	BRASS	Au 1u-3u",Ni 30-80u"
①	HOUSING	1	PA6T	BLACK
No.	PART NAME	MANY	MATERIAL	FINISH

5X					
4X					
3X					
2X					
1X	ORIGINAL	Hu.CH			
REV	DESCRIPTION	DR.BY	ECN.	NO.	

DR.BY:	Hu.CH
CHKD.:	Hu.CH
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
x: ±0.40	x': ±5.0°
x.x: ±0.25	x.x': ±3.0°
x.xx: ±0.15	x.xxx: ±2.0°
x.xxx: ±0.15	x.xxx': ±1.0°

PART NO :	DC35001RF-09A-01-X
DWG. NO.:	
TITLE :	9PIN DC JACK
DATE:	21-Dec-2023

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4