

**Specifications:**

**Material And Finish:**

Contact: Phosphor Bronze  
 Plated: See Ordering Information  
 Wire Range: AWG#24-#30  
 Insulation OD: 1.4mm MAX

**Rating:**

Current Rating: 24AWG: Single Ckt: 6.00A  
 24AWG: Fully Loaded (50 Ckts): 2.40A  
 26AWG: Single Ckt: 5.40A  
 26AWG: Fully Loaded (50 Ckts): 2.20A  
 28AWG: Single Ckt: 5.00A  
 28AWG: Fully Loaded (50 Ckts): 2.00A  
 30AWG: Single Ckt: 4.40A  
 30AWG: Fully Loaded (50 Ckts): 1.80A  
 Voltage Rating: 125V AC/DC  
 Operating Temperature Range: -40° ~ +105°C


**Electrical:**

Contact resistance: 40m Ohm Max  
 Insulator resistance: 1000M ohm min.  
 Withstanding Voltage: 500V AC/Minute

**Ordering Information**

H20150AT-PX  
 1 2 3

- 1: Series No.
- 2: Terminal
- 3: L: 15u" Gold on contact, Matte Tin on tail  
 Q: TIN Plated

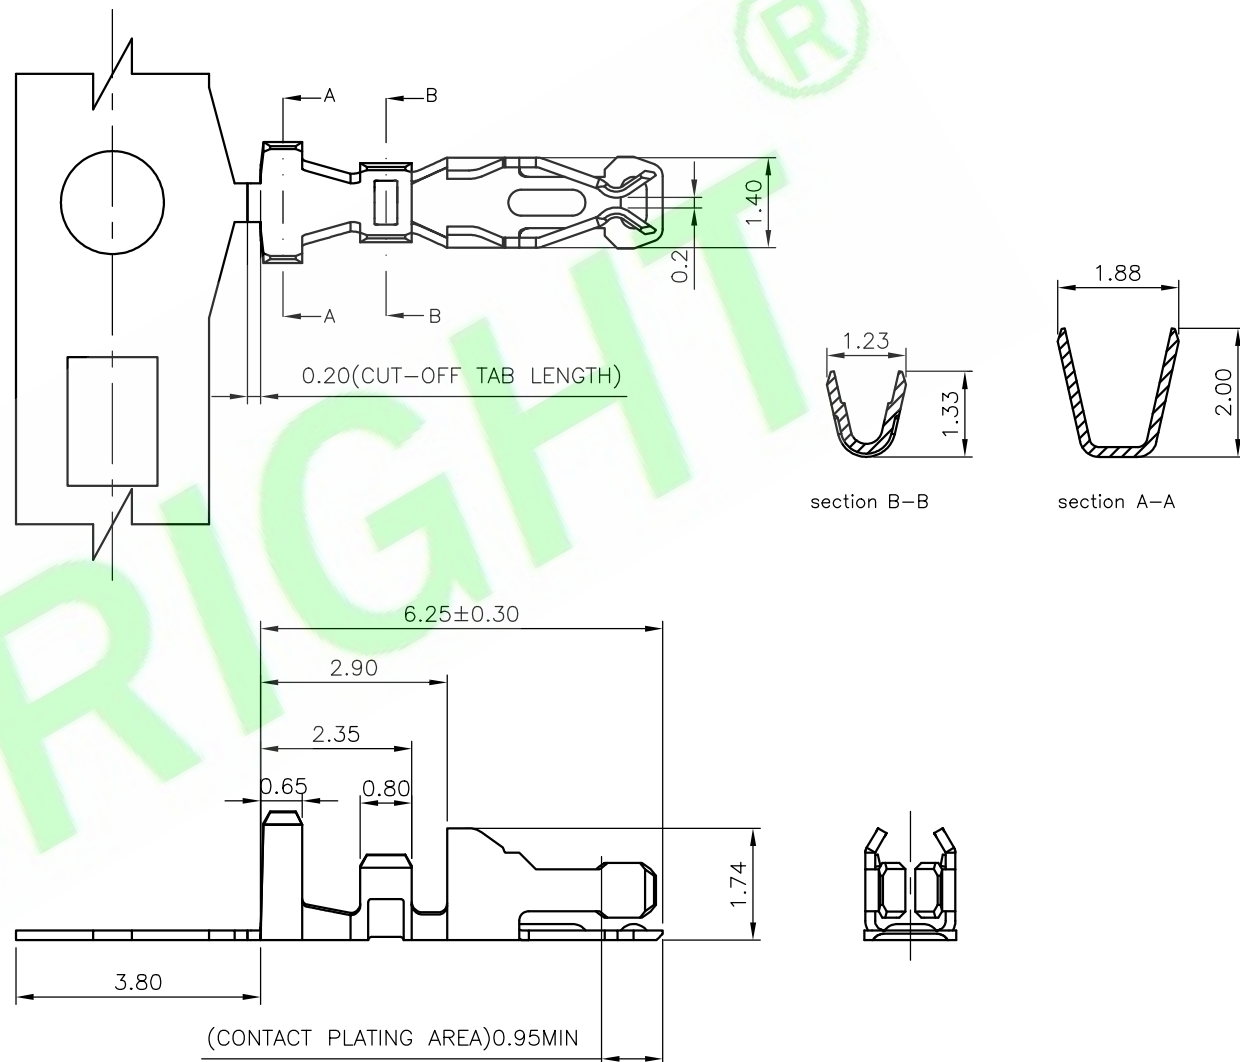

5X				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : H20150AT-PX
4X					LINEAR	ANGLES	DWG. NO.:
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE : 2.0MM GRID W TO B CONN. CRIMP TERMINAL
2X					x.x: ±0.25	x.x': ±3.0°	DATE: 17-Apr-2023
1X	ORIGINAL	Zolin		APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°	
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx': ±1.0°	

**HJBRIGHT** 東莞市華晶電子有限公司  
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
 SCALE: 1:1  
 UNIT: mm

THIRD ANGLE PROJECTION

**A4**