






Specifications:
 Material And Finish:
 Insulator:PBT UL94V-0
 Color:Black

Rating:
 Current Rating:3.0 Amp(Power)
 Operating Temperature Range:-55~+105°C

Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:1000V AC/Minute

Ordering Information
 H20200F-XXP-02-BA
 1 2 3 4 5

- 1: — Series No.
- 2: — F:Female Housing
- 3: — No. of Positions
- 4: — B:Black
- 5: — A:In Bag

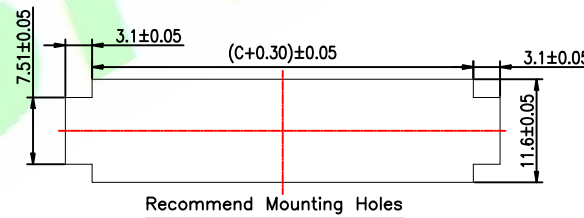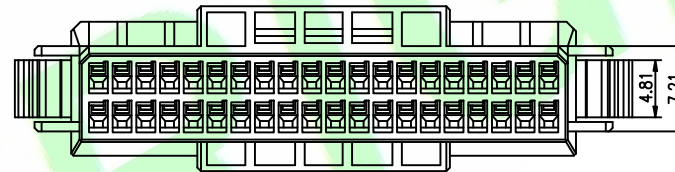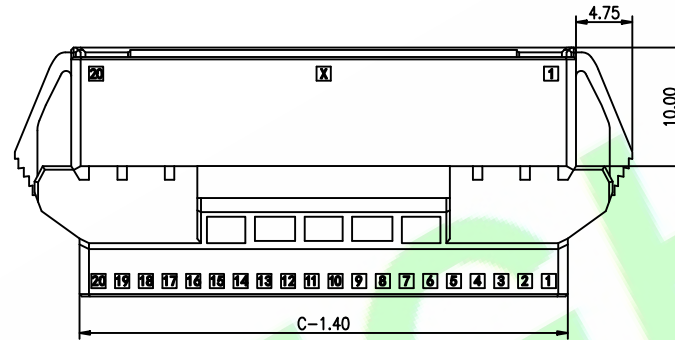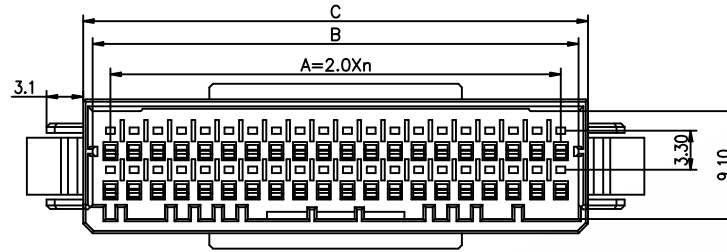

Circuit No.	Dimensions		
	A	B	C
P	8.00	11.00	12.60
P	16.00	19.00	20.60
P	18.00	21.00	22.60
P	20.00	23.00	24.60
P	22.00	25.00	26.60
P	24.00	27.00	28.60
P	26.00	29.00	30.60
P	28.00	31.00	32.60
P	30.00	33.00	34.60
P	32.00	35.00	36.60
P	38.00	41.00	42.60

5X			
4X			
3X			
2X			
1X	ORIGINAL	Aren	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Aren	GENERAL TOLERANCE:	
CHKD.: Aren	LINEAR	ANGLES
APPD.: Billy	X.: ±0.40	X': ±5.0°
	X.X: ±0.30	X.X': ±3.0°
	X.XX: ±0.20	X.XX': ±2.0°
	X.XXX: ±0.10	X.XXX': ±1.0°


PART NO : H20200F-XXP-02-BA
DWG. NO.:
TITLE : Double-row 2.0 pitch Wafer HOUSING
DATE:

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED


SHEET: 1/2
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION


A4

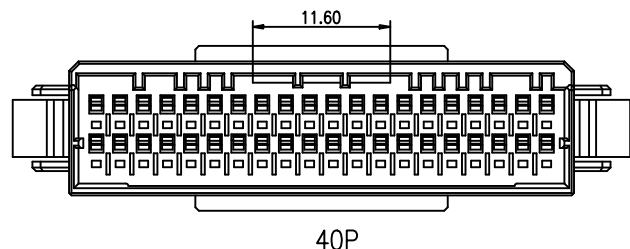


40P

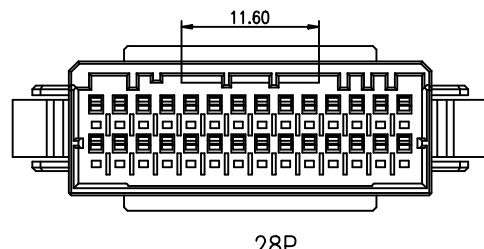


28P

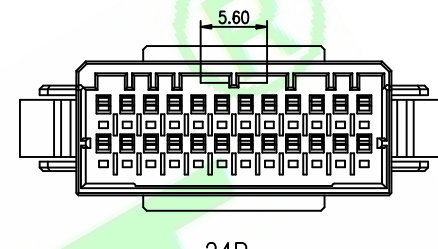


24P

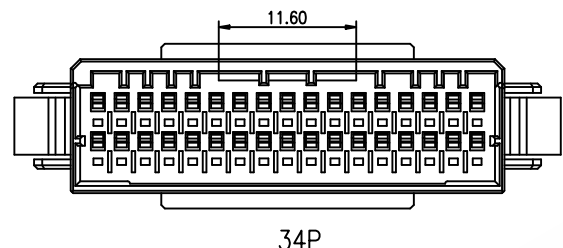


34P

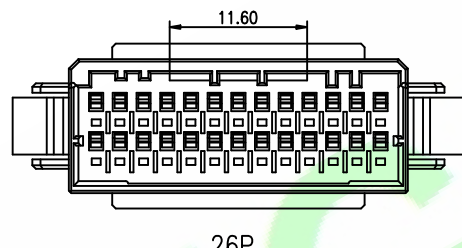


26P

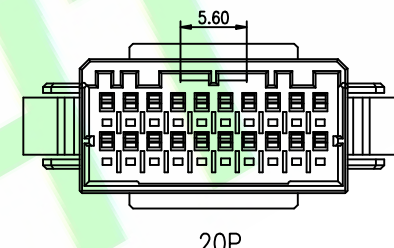


20P

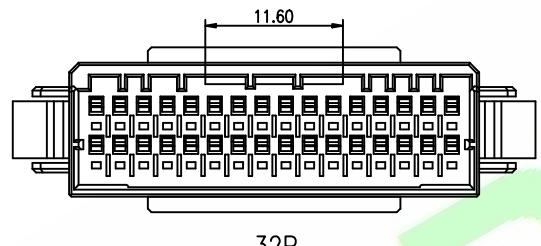


32P

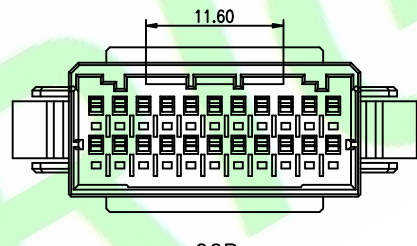


22P

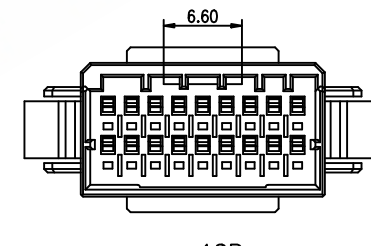

18P

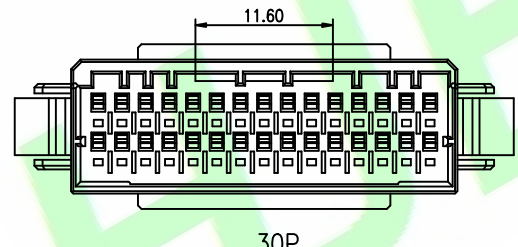

30P



10P

5X			
4X			
3X			
2X			
1X	ORIGINAL	Aren	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Aren	GENERAL TOLERANCE: LINEAR ANGLES
CHKD.: Aren	
APPD.: Billy	X.: ±0.40 X': ±5.0° X.X: ±0.30 X.X': ±3.0° X.XX: ±0.20 X.XX': ±2.0° X.XXX: ±0.10 X.XXX': ±1.0°

PART NO : H20200F-XXP-02-BA
DWG. NO.:
TITLE : Double-row 2.0 pitch Wafer HOUSING
DATE:

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/2
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4