

Specifications:



Material And Finish:
Insulator:PA66 UL94-V0 Color:Natural

Rating:

Current Rating:16.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature Range:-25~+85°C



Electrical:

Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Withstanding Voltage:1000V AC/Minute

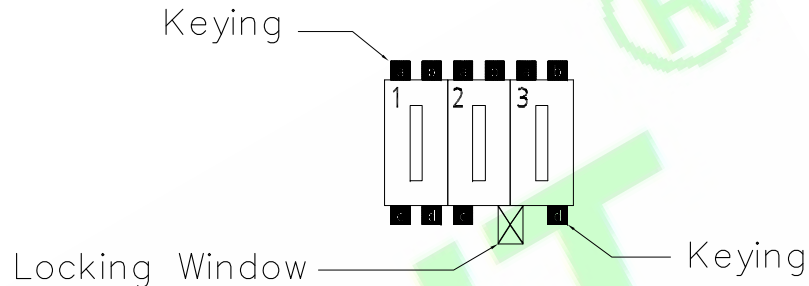

Ordering Information
RAST5001-XXP-01-XXA

- 1: — Series No.
- 2: — No. of Positions
- 3: — Fool proof type
- 4: — A:In Tray

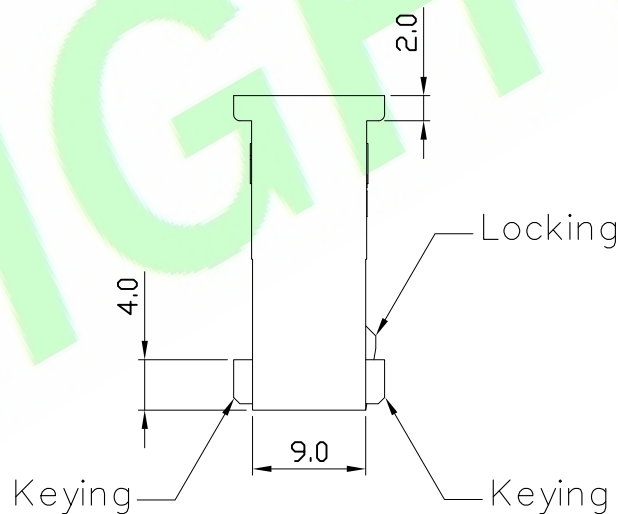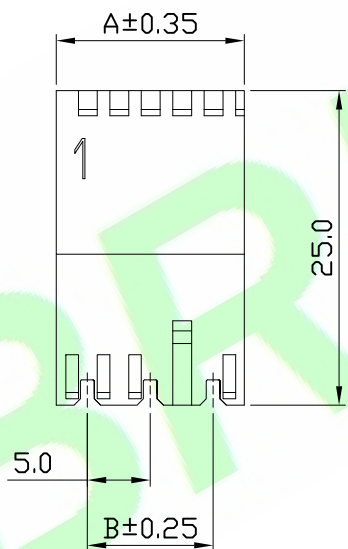

No.	Dimension mm	
	DIMA	DIMB
02	10.00	5.00
03	15.00	10.00
04	20.00	15.00
05	25.00	20.00
06	30.00	25.00
07	35.00	30.00
08	40.00	35.00
09	45.00	40.00
10	50.00	45.00
11	55.00	50.00
12	60.00	55.00

5X				DR.BY.: Judyyan
4X				CHKD.: Aren
3X				APPD.: Billy
2X	ORIGINAL	Judyyan		
1X	DESCRIPTION	DR.BY	ECN. NO.	
REV.				

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.25	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : RAST5001-XXP-01-XXA
DWG. NO.:
TITLE : 5.0mm Pitch RASTER Housing
DATE: 28-Aug-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED


SHEET: 1/2
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION


A4

1. Anti-fool type option 2~11P


2Polig/2-Way

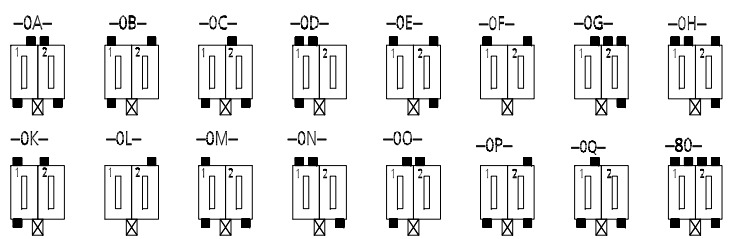


5Polig/5-Way

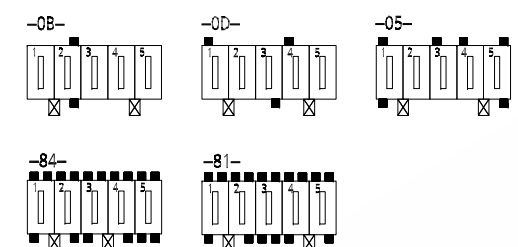


11Polig/11-Way

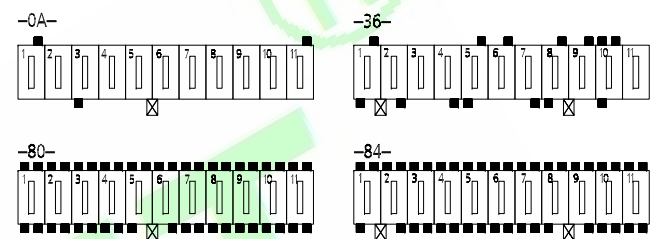


3Polig/3-Way

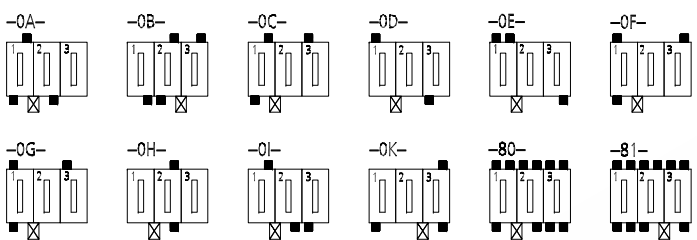


6Polig/6-Way

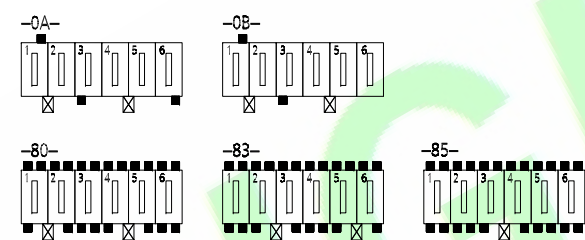


10Polig/10-Way




4Polig/4-Way

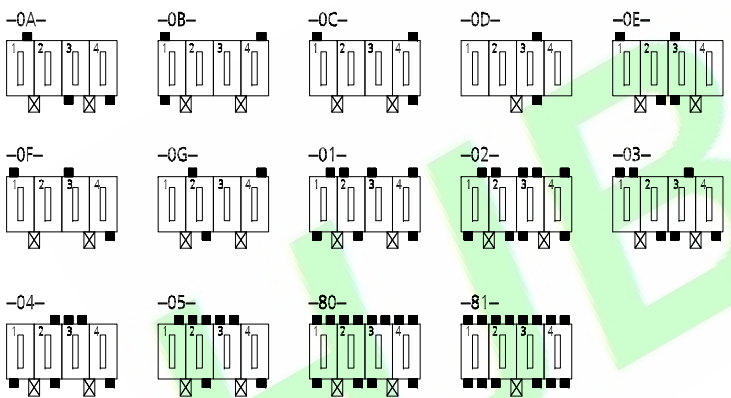


7Polig/7-Way

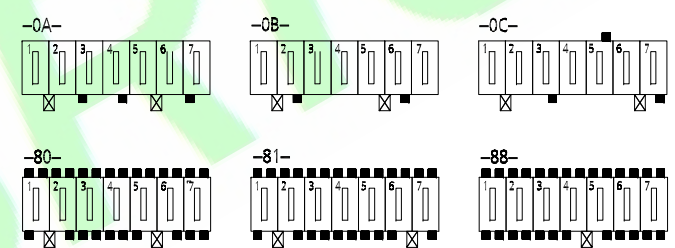

9Polig/9-Way

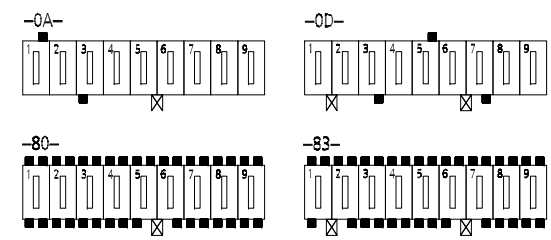

8Polig/8-Way



5X			DR.BY.:
4X			Judyyan
3X			CHKD.:
2X			Aren
1X	ORIGINAL	Judyyan	APPD.:
REV.	DESCRIPTION	DR.BY	Billy
		ECN. NO.	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.25	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO :	RAST5001-XXP-01-XXA
DWG. NO.:	
TITLE :	5.0mm Pitch RASTER Fool proof type
DATE:	28-Aug-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/2
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4