

**Specifications:**

Material And Finish:  
Insulator:PA66 UL94-V0 Color:Natural

**Rating:**

Current Rating:16.0 Amp  
Voltage Rating:250V AC/DC  
Operating Temperature Range:-25~+85°C



**Electrical:**

Contact resistance:20m Ohm Max  
Insulator resistance:1000M ohm min.  
Withstanding Voltage:1000V AC/Minute

**Ordering Information**

**RAST5001-XXP-02-XXA**

- 1: — Series No.
- 2: — No. of Positions
- 3: — Fool proof type
- 4: — A:In Bag

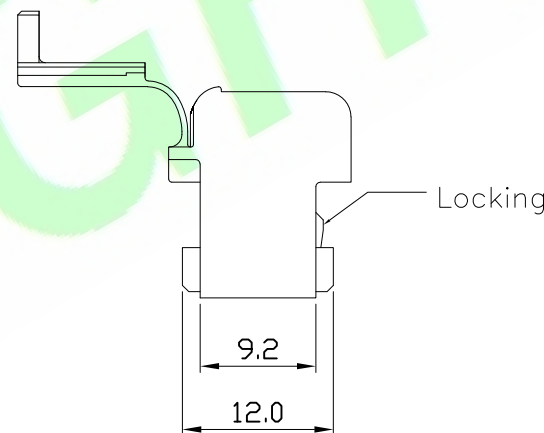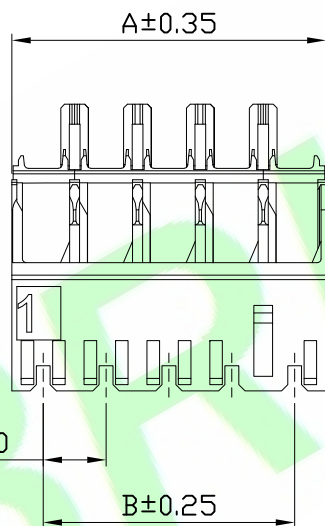

No.	Dimension mm	
	DIMA	DIMB
02	10.00	5.00
03	15.00	10.00
04	20.00	15.00
05	25.00	20.00
06	30.00	25.00
07	35.00	30.00
08	40.00	35.00

5X			
4X			
3X			
2X			
1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:	
CHKD.: Aren	LINEAR	ANGLES
APPD.: Billy	X.: ±0.30	X': ±5.0°
	X.X: ±0.25	X.X': ±3.0°
	X.XX: ±0.15	X.XX': ±2.0°
	X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : RAST5001-XXP-02-XXA
DWG. NO.:
TITLE : 5.0mm Pitch RASTER Housing
DATE: 28-Aug-2021

**HJBRIGHT®** 東莞市華晶電子有限公司  
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED


SHEET: 1/2  
SCALE: 1:1  
UNIT: mm

THIRD ANGLE PROJECTION


**A4**

# 1. Anti-fool type option 2~11P


## 2Polig/2-Way

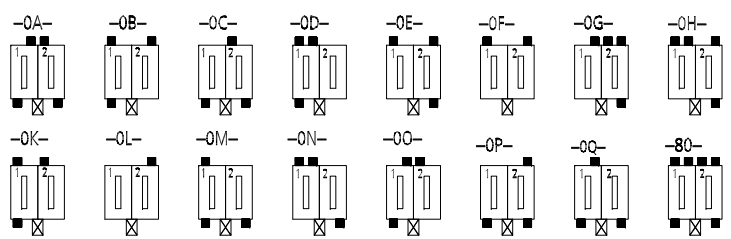


## 5Polig/5-Way

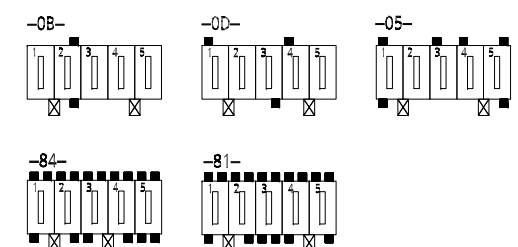


## 11Polig/11-Way

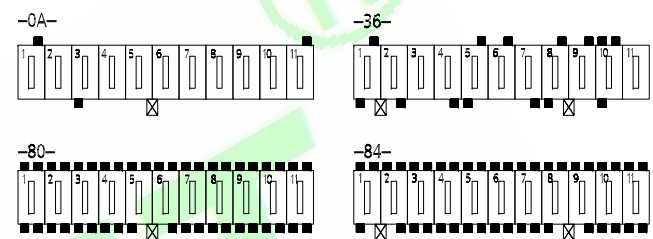


## 3Polig/3-Way

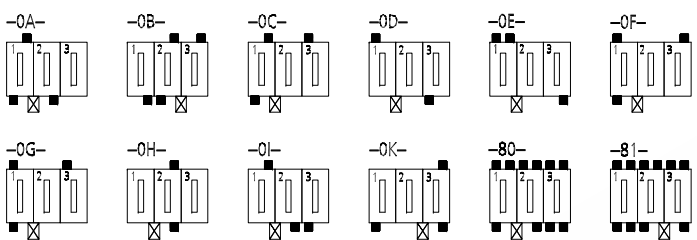


## 6Polig/6-Way

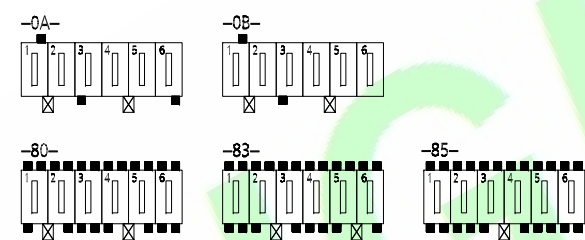


## 10Polig/10-Way




## 4Polig/4-Way

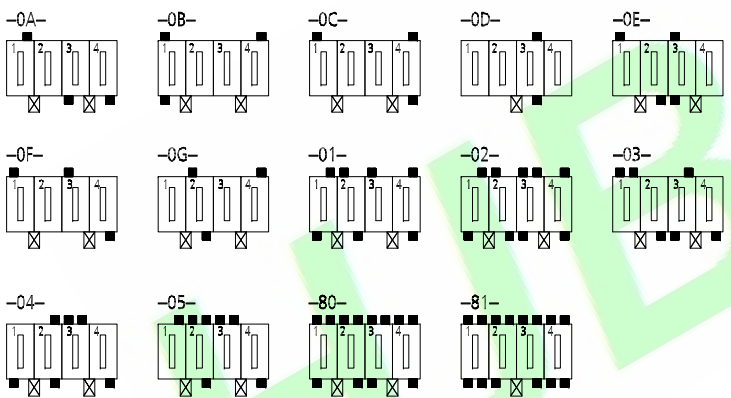


## 7Polig/7-Way

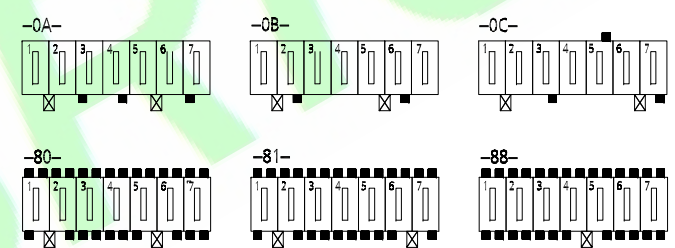

## 9Polig/9-Way

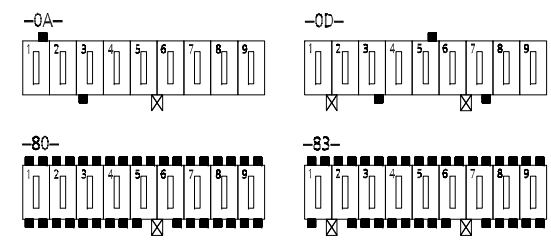

## 8Polig/8-Way



5X			DR.BY.:
4X			Judyyan
3X			CHKD.:
2X			Aren
1X	ORIGINAL	Judyyan	APPD.:
REV.	DESCRIPTION	DR.BY	Billy
		ECN. NO.	

GENERAL TOLERANCE:	
LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.25	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO :	RAST5001-XXP-02-XXA
DWG. NO.:	
TITLE :	5.0mm Pitch RASTER Fool proof type
DATE:	28-Aug-2021

**HJBRIGHT**® 东莞市華晶電子有限公司  
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 2/2  
SCALE: 1:1  
UNIT: mm

THIRD ANGLE PROJECTION

**A4**