

Specifications:

Material And Finish:

Insulator:PA66 UL94-V0 Color:Natural

Contact:Brass

Rating:

Current Rating:16.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25~+85°C


Electrical:

Contact resistance:20m Ohm Max


Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Keying



Locking Window

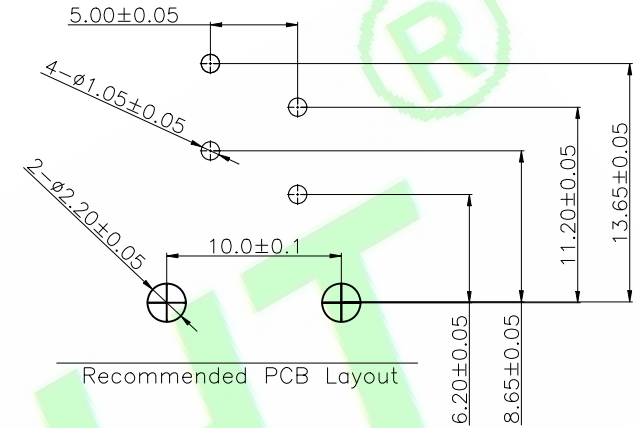


Ordering Information



RAST5001R-02X-2-0AX

1 2 3 4 5 6

- 1: — Series No.
- 2: — R:R/A Type
- 3: — No. of Positions
- 4: — S: Matter Tin Plated
AG: Silver Plated
- 5: — Fool proof type
- 6: — B: In Tube
C: In Tray

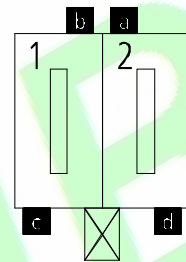

Key position diagram
Fool proof type: OA

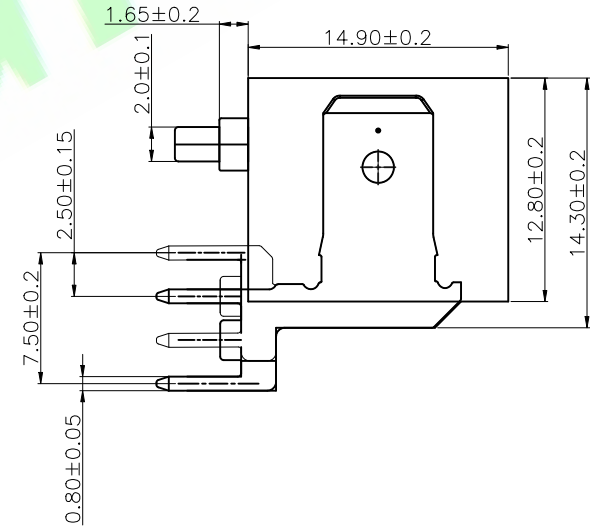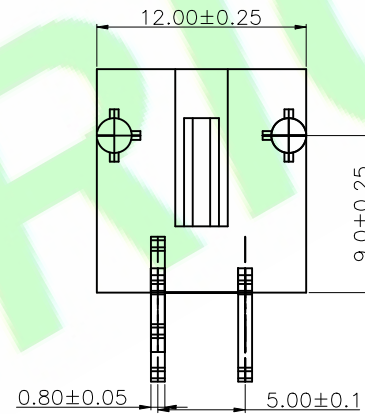

5X			
4X			
3X			
2X	New anti-dork structure	Judyyan	20221207
1X	ORIGINAL	Mark	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY:	Mark
CHKD.:	Tony
APPD.:	Billy

GENERAL TOLERANCE:	
LINEAR	ANGLES
x.: ±0.30	x': ±5.0°
x.x: ±0.25	x.x': ±3.0°
x.xx: ±0.15	x.xx': ±2.0°
x.xxx: ±0.10	x.xxx': ±1.0°

PART NO :	RAST5001R-02X-2-0AX
DWG. NO.:	
TITLE :	5.0mm Pitch RASTER R/A Type
DATE:	28-Aug-2021

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4