

RoHS Compliant

Automobile
Product

NOTE:

MATERIAL: Brass $T=0.40\pm0.02$

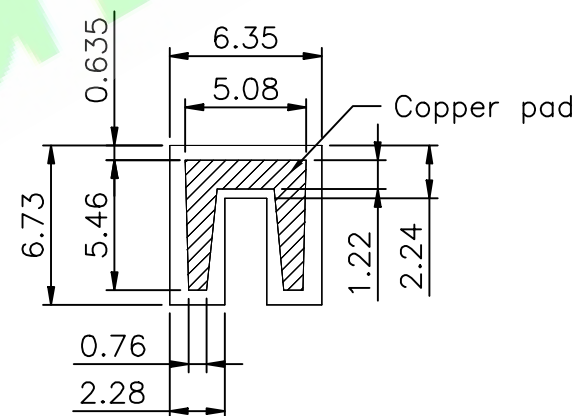
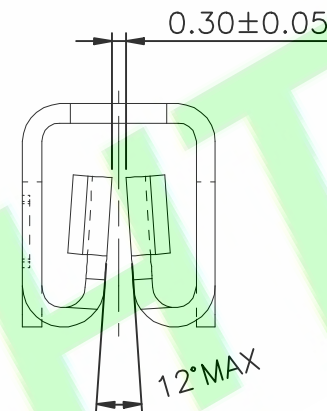
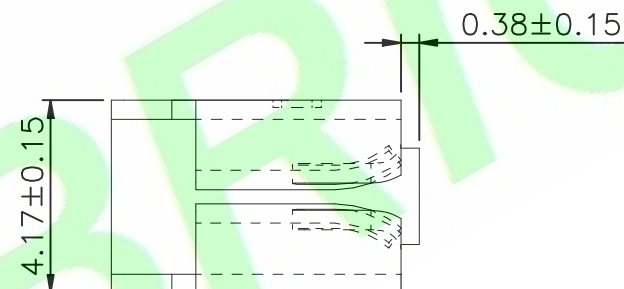
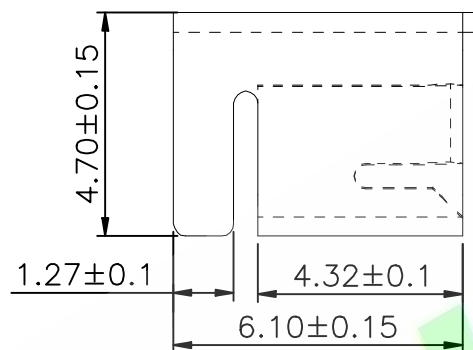
Plated: Matte Tin Plated

80-240u"(2-6 μ m) Over NickelPlated 40-120u"(1-3 μ m)

Current Rating: 25A

Packaging : Tape Reel

Quantity: 1000 PCS/Reel

RECOMMENDED P.C.B LAYOUT
TOLERANCE = ± 0.05 mm

				DR.BY.: JoinZm		GENERAL TOLERANCE:		PART NO : 1237-01		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
				CHKD.: Judyyan		LINEAR	ANGLES	DWG. NO.:							
						x.:	x°: ±	TITLE : SMT UNIVERSAL TAB RECEPTACLE TOP ENTRY							
						x.x: ±0.30	x.x°: ±3.0°								
						x.xx: ±0.20	x.xx°: ±2.0°								
APPD.: Billy		x.xxx: ±0.10	x.xxx°: ±1.0°	DATE: 06-Nov-2023		SHEET: 1/1				A4					
REV.		DESCRIPTION		DR.BY		ECN. NO.						SCALE: 1:1			
												UNIT: mm			
1		2		3		4		5		6		7		8	