

REACH SVHC(235) Compliant

RoHS Compliant

Note:

Material:Brass C2600 EH

Plated:Matte Tin Plated 80-160u"(2-4 μm)

Over Nickel Plated 40-80u"(1-2 μm)

Insertion Force With A 0.8mm Thick

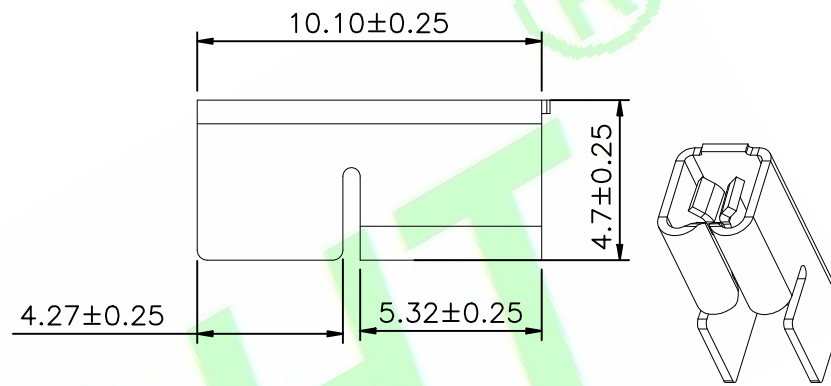
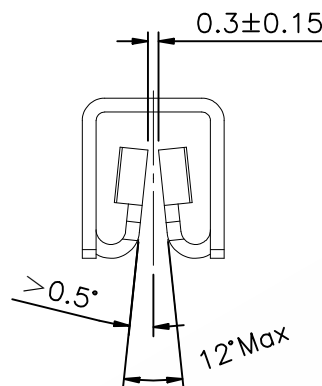
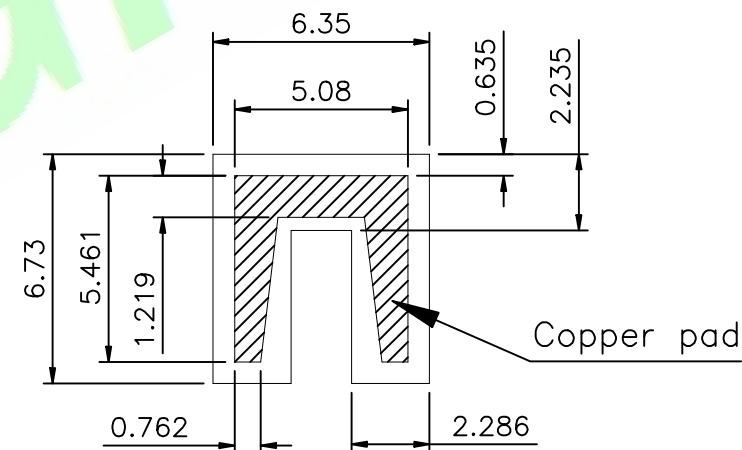
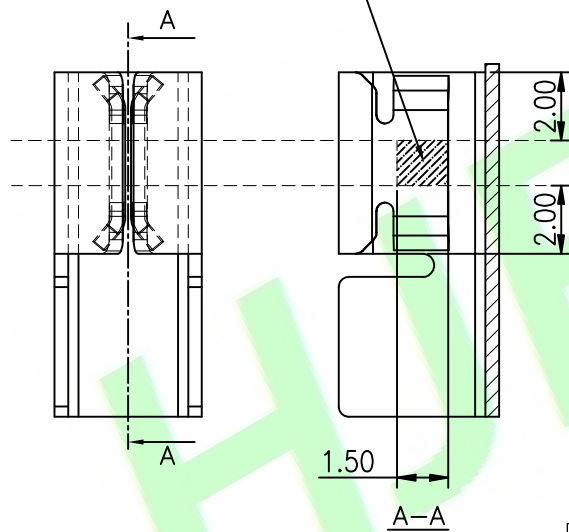
Tab:30N ±7N

Withdrawal Force With A 0.8mm

ThickTab:47N+17N

Thickness 0.41mm+0.025mm

Current Rating:25A

Contact Plating
area measurementRECOMMENDED P.C.B LAYOUT
TOLERANCE=±0.05mm

1X	ORIGINAL	Hu.CH	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Hu.CH	GENERAL TOLERANCE:		PART NO : 1238-10
	LINEAR	ANGLES	
CHKD.: Hu.CH	X.:	X': ±	DWG. NO.:
	X.X: ±0.30	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.20	X.XX': ±2.0°	TITLE : SMT UNIVERSAL TAB RECEPTACLE TOP AND BOTTOM ENTRY
	X.XXX: ±0.10	X.XXX': ±1.0°	
			DATE: 22-Mar-2025

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4