







Plated:See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

C:\n Tray

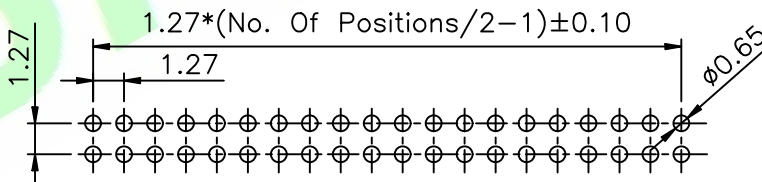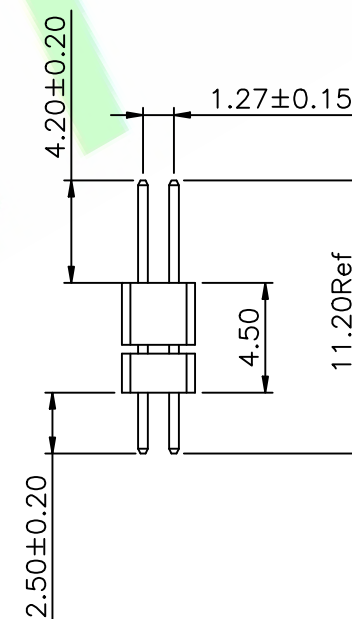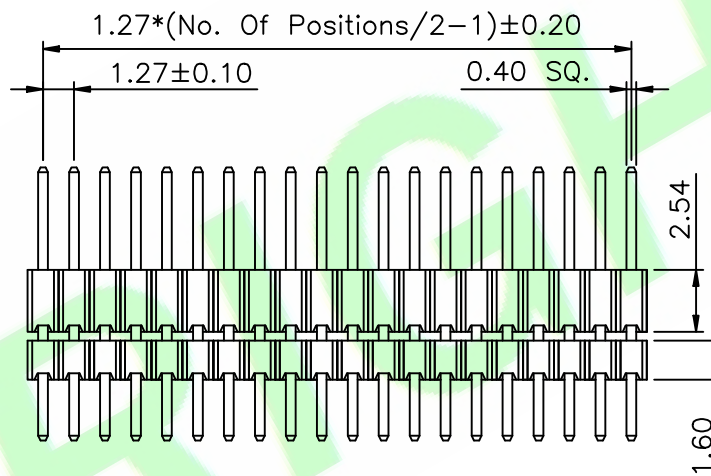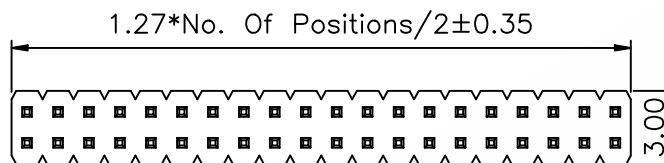

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.: yhj	GENERAL TOLERANCE:		PART NO : 127022S-XXX112-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR ANGLES		DWG. NO.: RD0807-288					
3X				CHKD.: Aren	x.: ±0.30	x': ±5.0"	TITLE : 1.27mm Pitch Pin Header Straight Type		SHEET: 1/1		 THIRD ANGLE PROJECTION	A4
2X					x.x: ±0.20	x.x': ±3.0"			SCALE: 1:1			
1X	ORIGINAL	yhj		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0"	DATE: 30-Jul-2008		UNIT: mm			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0"						

THIRD ANGLE PROJECTION

A4