

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

12711R-XXX114-X

1 2 3 4 5

1: — Series No.

2: — R:R/A Type

3: — No. of Positions

4: — A:Gold Flash





H:Selective Gold Plated

Q:Tin Plated

5: — A:In bag

B: Tube

C: Tray

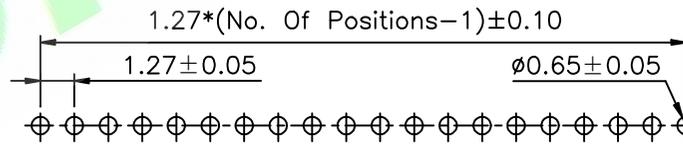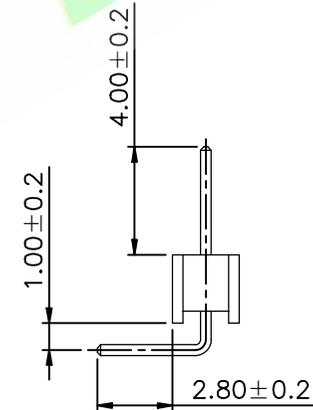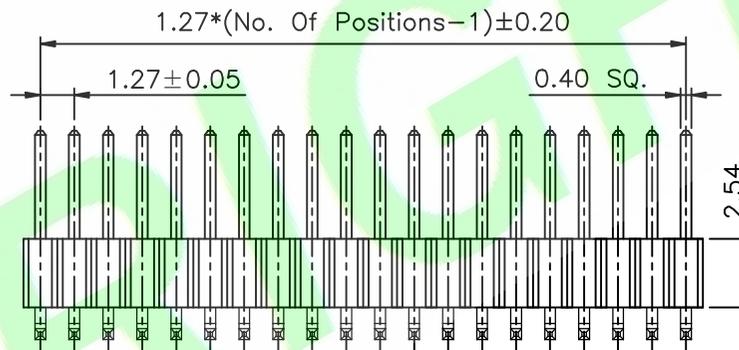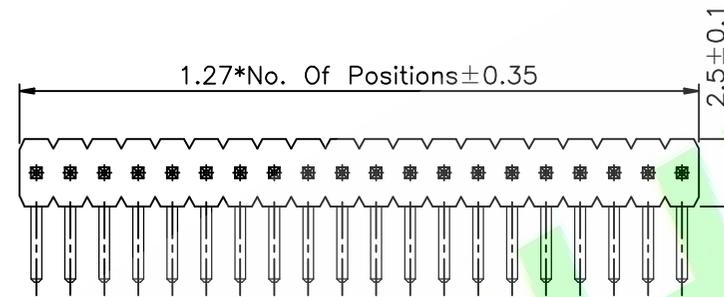

Recommended PCB Layout

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 12711R-XXX114-X
CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Pin Header R/A Type
	x.x: ±0.20	x.x': ±3.0°	DATE: 28-Jul-2008
	x.xx: ±0.15	x.xx': ±2.0°	
	x.xxx: ±0.10	x.xxx': ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.