

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information

12721R-XXX098-NX

1 2 3 4 5

- 1:— Series No.
2:— R/R/A Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:Tube
C:Tray

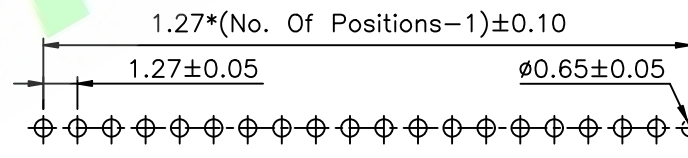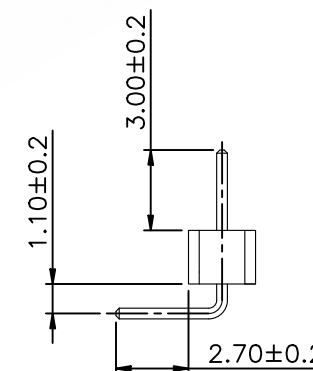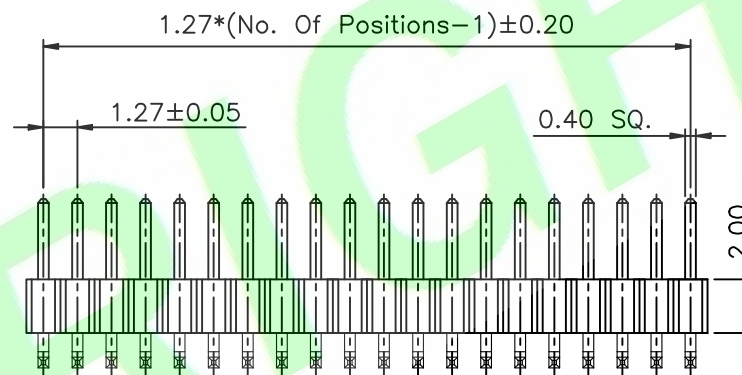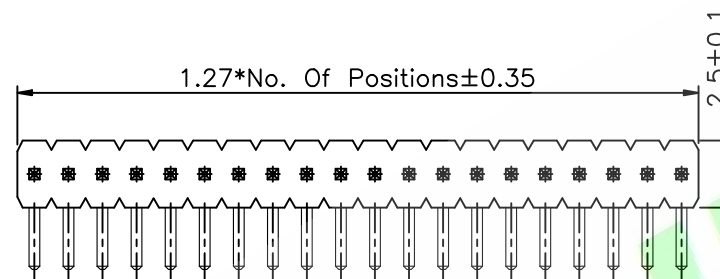

Recommended PCB Layout

1X REV. ORIGINAL DESCRIPTION Samson DR.BY ECN. NO.				DR.BY.: Samson		GENERAL TOLERANCE:		PART NO : 12721R-XXX098-NX		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
				CHKD.: Tony		LINEAR		ANGLES						DWG. NO.:	
						x.: ±0.30		x': ±5.0°		TITLE : 1.27mm Pitch Pin Header R/A Type					
						x.x: ±0.20		x.x': ±3.0°							
						x.xx: ±0.15		x.xxx: ±2.0°							
APPD.: Billy				x.xxx: ±0.10		x.xxxx: ±1.0°		DATE: 28-Jul-2008		SHEET: 1/1		 THIRD ANGLE PROJECTION		A4	
								UNIT: mm							
1		2		3		4		5		6		7		8	