

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information

12751S-XXX067-NX

1 2 3 4 5

- 1:—Series No.
2:—S:Straight Type
3:—No. of Positions
4:—A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:—A:In bag
B:Tube
C:Tray

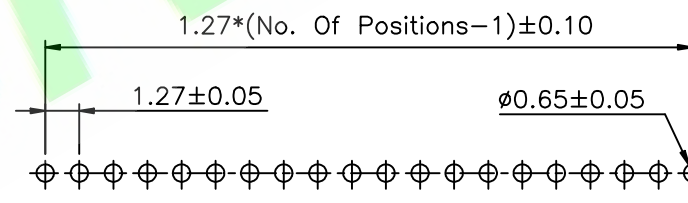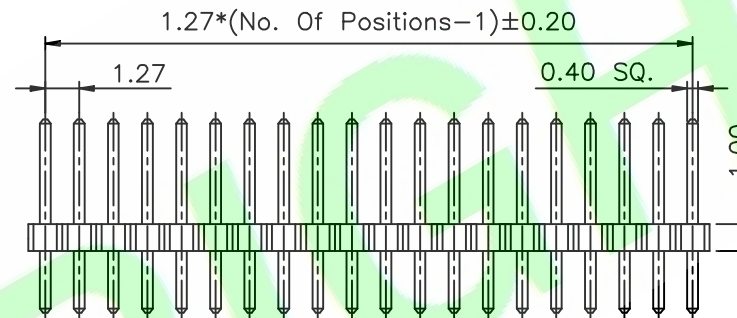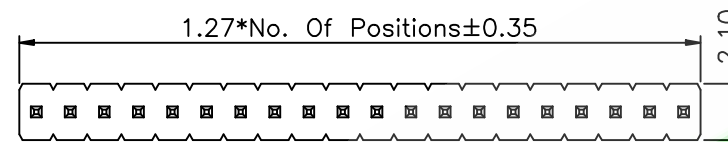

Recommended PCB Layout

				DR.BY: Kenry		GENERAL TOLERANCE:		PART NO : 12751S-XXX071-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
						LINEAR	ANGLES	DWG. NO.:							
				CHKD.: Tony		X.: ±0.30	X': ±5.0°			TITLE : 1.27mm Pitch Pin Header Straight Type		SHEET: 1/1		A4	
						X.X: ±0.20	X.X': ±3.0°								
				APPD.: Billy		X.XX: ±0.15	X.XX': ±2.0°		SCALE: 1:1						
						X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 20-Nov-2014				UNIT: mm	THIRD ANGLE PROJECTION		
1X	ORIGINAL			Kenry											
REV.	DESCRIPTION			DR.BY	ECN. NO.										
1				2		3		4		5		6		7	8