

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information

12751S-XXXXXX-NX

1 2 3 4 5

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5:— A: In bag
B: Tube
C: Tray

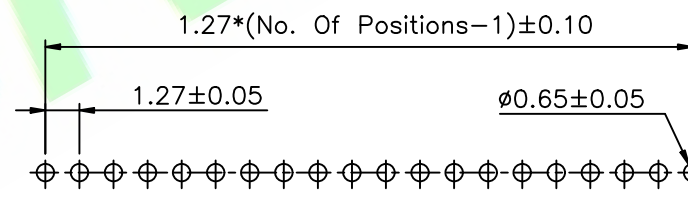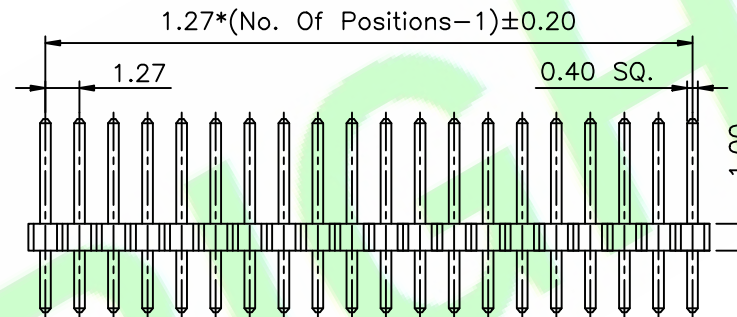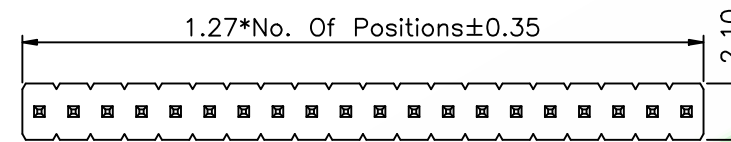

Recommended PCB Layout

				DR.BY.: Kenry		GENERAL TOLERANCE:		PART NO : 12751S-XXXXXX-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
				CHKD.: Tony		LINEAR	ANGLES	DWG. NO.:							
				APPD.: Billy		X.: ±0.30	X': ±5.0°	TITLE : 1.27mm Pitch Pin Header Straight Type		SHEET: 1/1		 THIRD ANGLE PROJECTION		A4	
						X.X: ±0.20	X.X': ±3.0°			SCALE: 1:1					
1X ORIGINAL Kenry						X.XX: ±0.15	X.XX': ±2.0°	DATE: 20-Nov-2014		UNIT: mm					
REV. DESCRIPTION DR.BY ECN. NO.						X.XXX: ±0.10	X.XXX': ±1.0°								
1		2		3		4		5		6		7		8	