

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Max Processing Temp:230°C for 30~60 Seconds
(260°C For 10 Seconds)

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

12751U-36A089-NB

1 2 3 4 5


1: — Series No.

2: — U:U Type


3: — No. of Positions

4: — A:Gold Flash

5: — B:In Tube:13PCS/Tube

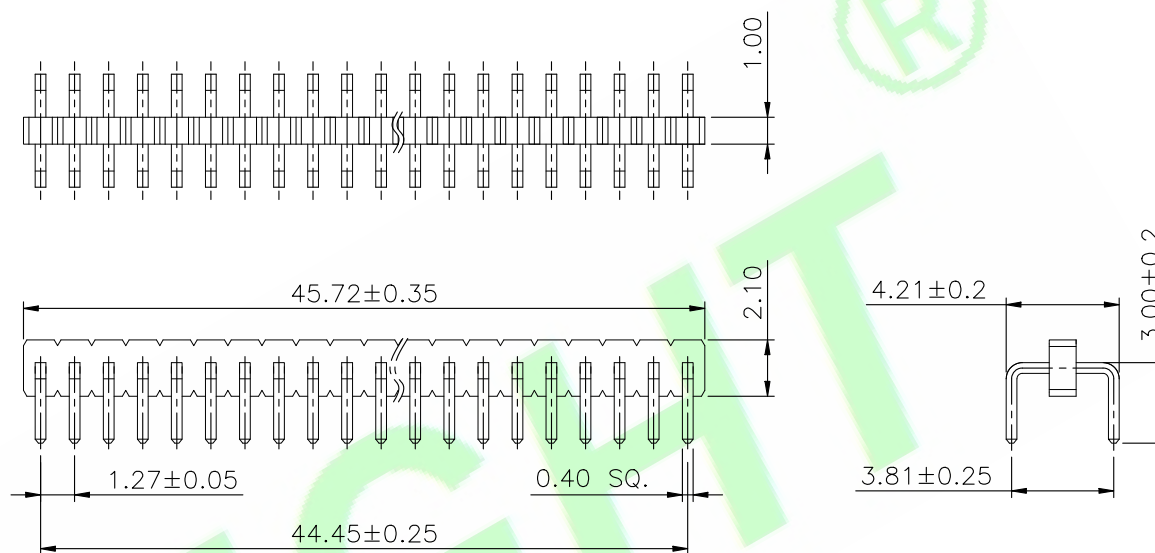

变形量<0.30Max

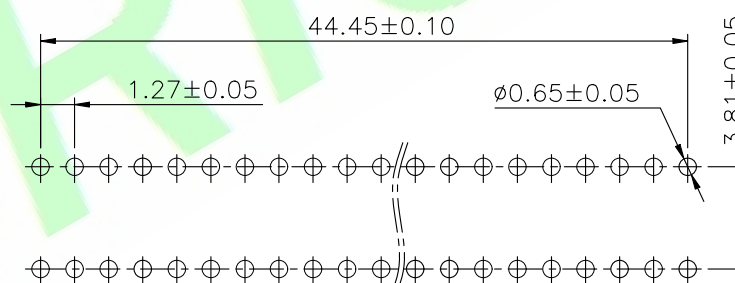

Recommended PCB Layout

				DR.BY.: Jack		GENERAL TOLERANCE:		PART NO : 12751U-36A089-NB		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
				CHKD.: Kenry		LINEAR	ANGLES	DWG. NO.:								
				APPD.: Billy		x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch Pin Header U Type								
1X	ORIGINAL		Jack				x.x: ±0.20	x.x': ±3.0°			SHEET: 1/1				A4	
REV.	DESCRIPTION		DR.BY	ECN. NO.			x.xx: ±0.15	x.xx': ±2.0°			SCALE: 1:1					
							x.xxx: ±0.10	x.xxx': ±1.0°			UNIT: mm					
1			2		3		4		5		6		7		8	