

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:Black

Contact:Brass

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

12762M-XXX078-XX

1 2 3 4 5 6

1:— Series No.

2:— R:R/A Type

3:— No. of Positions

4:— A:Gold Flash

E:3u" Gold on contact;Matte Tin on tail

H:Gold Flash on contact;Matte Tin on tail

T:10u" Gold on contact;Matte Tin on tail

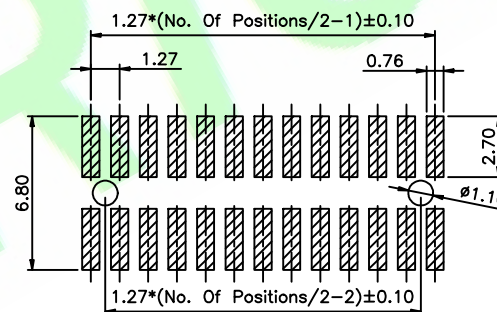
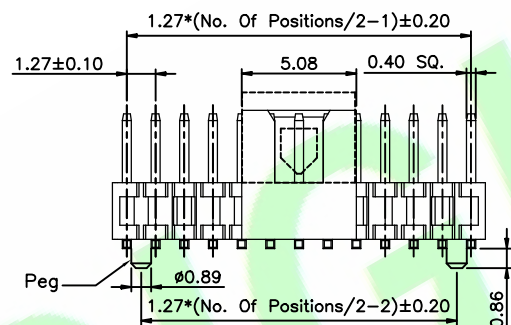
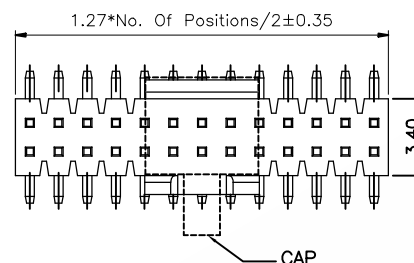
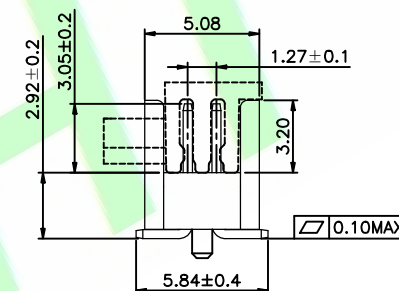
5:— 0:Without Peg

1:With Peg


6:— B:In Tube

E:W/Cap In Tube

F:W/Cap In Tape&Reel

Recommended PCB Layout
(Tolerance:0.05mm)

With Peg



Without Peg

1X	ORIGINAL	Samson
REV.	DESCRIPTION	DR.BY

DR.BY: Samson	GENERAL TOLERANCE:		PART NO : 12762M-XXX078-XX
	LINEAR	ANGLES	
	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
	X.XX: ±0.15	X.XX': ±2.0°	TITLE :
CHKD.: Tony	X.XXX: ±0.10	X.XXX': ±1.0°	
APPD.: Billy	DATE: 7-Sep-2013		1.27mm Pitch Pin Header SMT Type

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4