


Plated:See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$




Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
F:W/Cap In Tape&Reel

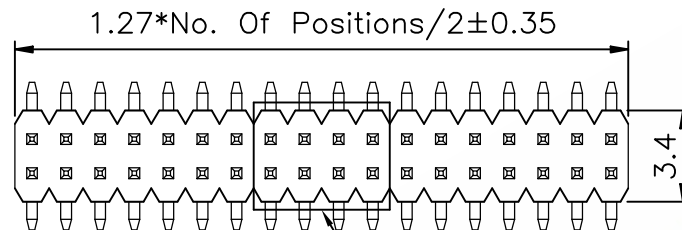

-Cap

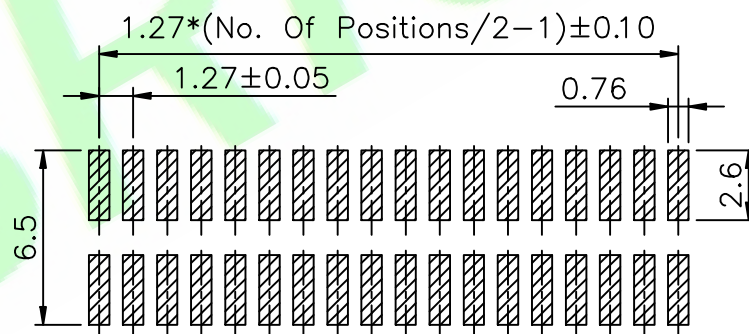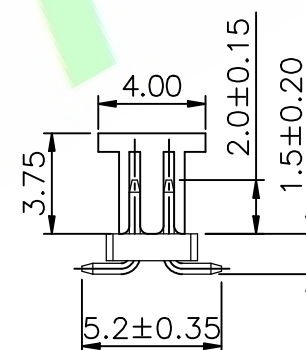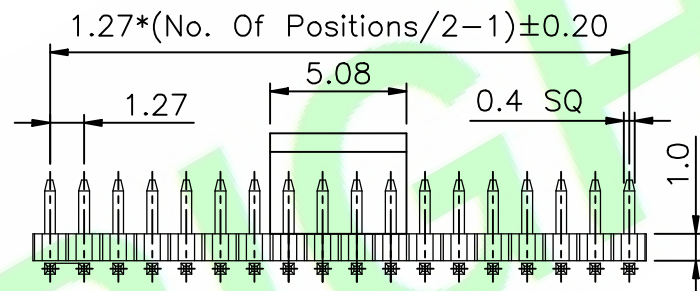

Recommended PCB Layout

				DR.BY.: Judyyan		GENERAL TOLERANCE:		PART NO : 12782M-XXX051A-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
				CHKD.: Tony		LINEAR ANGLES		DWG. NO.:							
				APPD.: Billy		x.: ±0.30 x.x: ±0.20 x.xx: ±0.15 x.xxx: ±0.10		x': ±5.0° x.x': ±3.0° x.xx': ±2.0° x.xxx': ±1.0°						TITLE : 1.27mm Pitch Pin Header SMT Type	
1X	ORIGINAL		Judyyan							SHEET: 1/1		 THIRD ANGLE PROJECTION		A4	
REV.	DESCRIPTION		DR.BY	ECN.		NO.				SCALE: 1:1					
										UNIT: mm					
1		2		3		4		5		6		7		8	