

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.


Withstanding Voltage:500V AC/Minute

Ordering Information




12782M-XXX063-NX

1 2 3 4 5

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
F:W/Cap In Tape&Reel

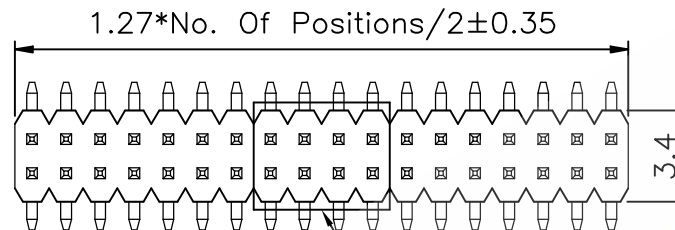

Cap

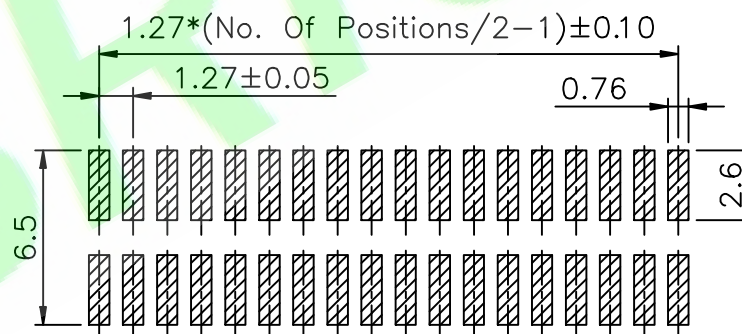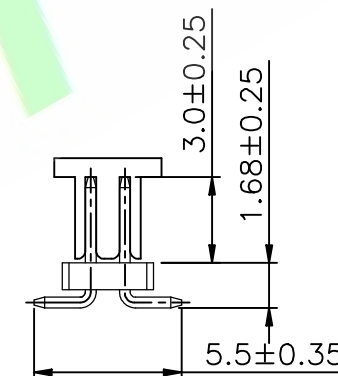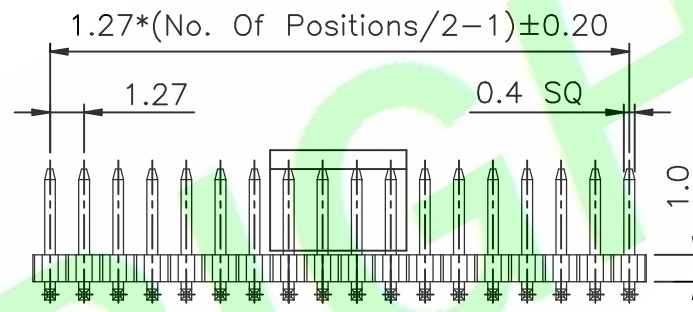

Recommended PCB Layout

				DR.BY.: Kenry		GENERAL TOLERANCE:		PART NO : 12782M-XXX063-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
						LINEAR		ANGLES					DWG. NO.:		
				CHKD.: Tony		x.: ±0.30		x': ±5.0°		TITLE : 1.27mm Pitch Pin Header SMT Type					
						x.x: ±0.20		x.x': ±3.0°							
				APPD.: Billy		x.xx: ±0.15		x.xx': ±2.0°		DATE: 21-May-2015					
						x.xxx: ±0.10		x.xxx': ±1.0°							
1X	ORIGINAL			Kenry						SHEET: 1/1			A4		
REV.	DESCRIPTION			DR.BY	ECN. NO.					SCALE: 1:1					
										UNIT: mm					
1		2		3		4		5		6		7		8	