


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{ C}$

Withstanding Voltage:500V AC/Minute

$$\overline{1} \quad \overline{2} \quad \overline{3} \quad \overline{4} \quad \overline{5}$$

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
H: Selective Gold Flash
Q: Tin Plated
E: 3u" Gold on Contact; Matte Tin on tail
T: 10u" Gold on Contact; Matte Tin on tail
5: — A: In bag
B: In Tube
C: In Tray

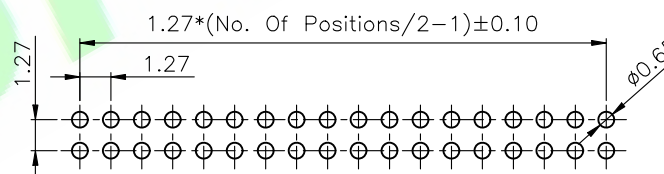

Recommended PCB Layout(Tolerance:0.05mm)

				DR.BY.: Kenry		GENERAL TOLERANCE:		PART NO : 12782S-XXX063A-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED							
						LINEAR		ANGLES						DWG. NO.:			
				CHKD.: Tony		x.: ±0.30 x': ±5.0°		x.x: ±0.20 x.x': ±3.0°						TITLE : 1.27mm Pitch Pin Header Straight Type			
1X		ORIGINAL		Kenry				APPD.: Billy		x.xx: ±0.15 x.xx': ±2.0°		SHEET: 1/1		 THIRD ANGLE PROJECTION		A4	
REV.		DESCRIPTION		DR.BY		ECN. NO.		x.xxx: ±0.10 x.xxx': ±1.0°		DATE: 5-May-2015		SCALE: 1:1					
										UNIT: mm							
1		2		3		4		5		6		7		8			