

RoHS Compliant



Specifications:

Material And Finish:

Insulator: Polyamide UL94V-0 Color: Green

Contact: Copper Alloy

Plated: See Ordering Information

Rating:

Current Rating: 10 Amps



Voltage Rating: 300V AC

Operating Temperature Range: -40°~+105°C


Electrical:

Contact resistance: 20m Ohm Max


Withstanding Voltage: 2500V AC/Minute

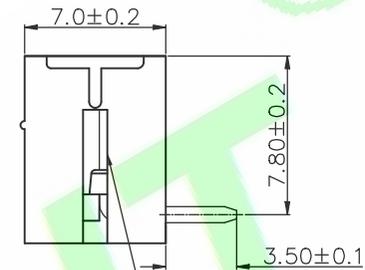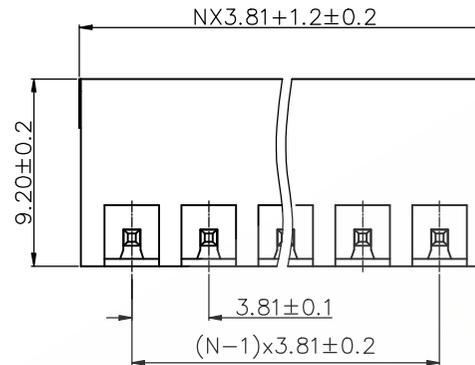

2-6 Poles are open type
7 Poles or above are enclosed

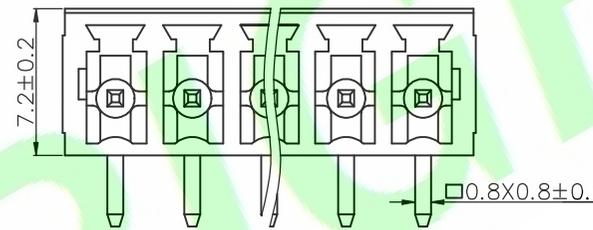

N=Number of contacts

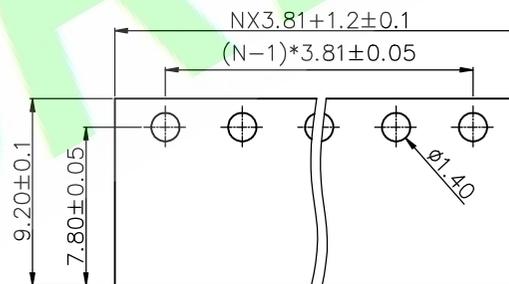

P.C.B. LAYOUT

Ordering Information

15B381D1RM-XXS-01-X
1 23 4 5 6

1: — Series No.

2: — R:R/A Type

3: — M:Male

4: — No. of Positions(2~24P)

5: — S:Matte Tin Plated

6: — A:In Bag

B:In Tube

C:In Tray

3X	Update the electroplating code	Judyyan	20260302
2X	Part number update	Judyyan	20260227
1X	ORIGINAL	Bin	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bin	GENERAL TOLERANCE:	PART NO : 15B381D1RM-XXS-01-X
CHKD.: Juddyan	LINEAR	DWG. NO.: DZT381R-XXQM-01-X
APPD.: Billy	ANGLES	TITLE :
	x: ±5.0°	3.81mm Pitch R/A Male Terminal Block
	> 30 ±0.20	x.x: ±3.0°
	6~30 ±0.30	x.xx: ±2.0°
	0~6 ±0.10	x.xxx: ±1.0°
		DATE: 26-Sep-2024

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4