


Specifications:
 Material And Finish:
 Insulator: Polyamide (Glass filled)UL94V-0 Color: Green
 Contact: Copper Alloy
 Plated: See Ordering Information

Rating:
 Current Rating: 10.0 Amps/way max
 Voltage Rating: 300V AC/DC
 Operating Temperature Range: -40°~+105°C




Electrical:
 Contact resistance: 20m Ohm Max
 Withstanding Voltage: 2500V AC/Minute

Ordering Information
 15B381D1RM-XXS-02-X
 1 23 4 5 6

- 1: — Series No.
- 2: — R:R/A Type
- 3: — M:Male
- 4: — No. of Positions (2~24P)
- 5: — S:Matte Tin Plated
- 6: — A:In Bag
 B:In Tube
 C:In Tray

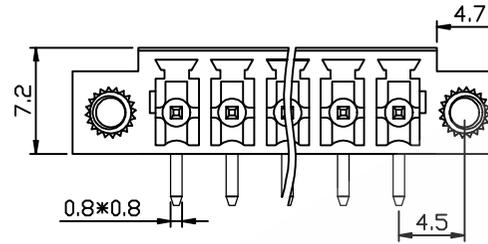

N=Number of contacts

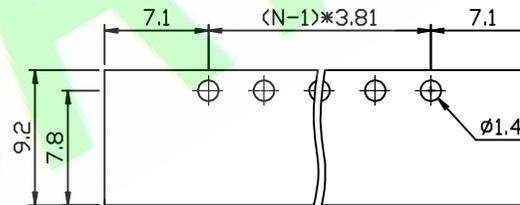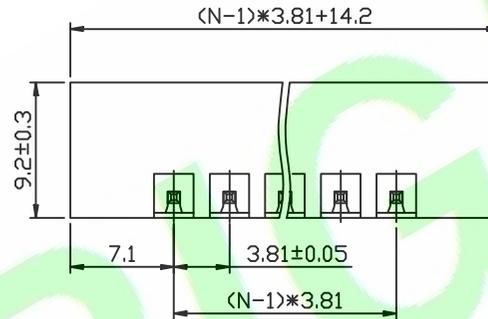

Recommended PCB LAYOUT (TOP VIEW)
 Tolerance: ±0.05mm

3X	Update the electroplating code	Judyyan	20260302
2X	Part number update	Judyyan	20260227
1X	ORIGINAL	Zolin	
REV	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Zolin	GENERAL TOLERANCE: LINEAR ANGLES	PART NO : 15B381D1RM-XXS-02-X
CHKD.: Sam		
APPD.: Billy	>30 ±0.30	DWG. NO.: DZT381R-XXXM-02-X
	6~30 ±0.20	TITLE : 3.81mm Pitch PCB Socket Header R/A Type
	0~6 ±0.10	DATE: 30-Jan-2025

SHEET: 1/1	
SCALE: 1:1	
UNIT: mm	

HJBRIGHT® 东莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

THIRD ANGLE PROJECTION

A4