

RoHS Compliant

Specifications:
Material And Finish:
Insulator:Polyamide UL94V-0 Color: Green
Contact:Copper Alloy
Plated:See Ordering Information
Wire range:16~26AWG

Rating:
Current Rating:10 Amps
Voltage Rating:300V AC
Operating Temperature Range:-40°~+105°C

Electrical:
Contact resistance:20m Ohm Max
Withstanding Voltage:2500V AC/Minute

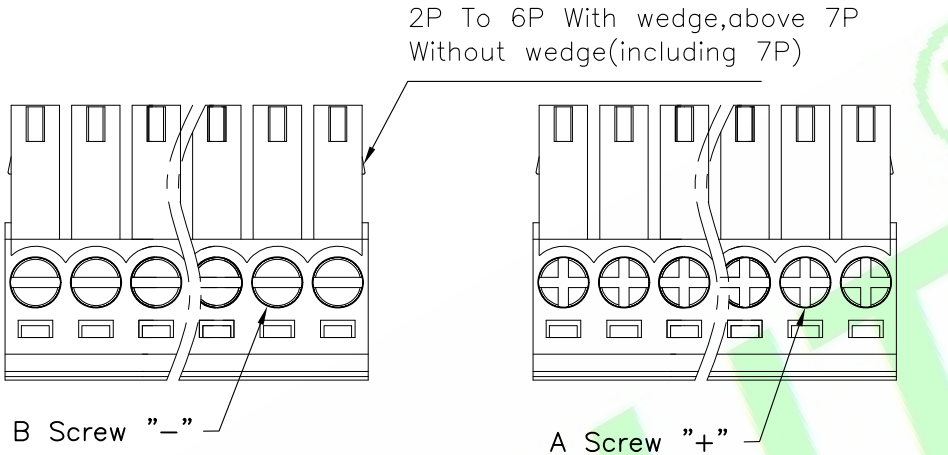

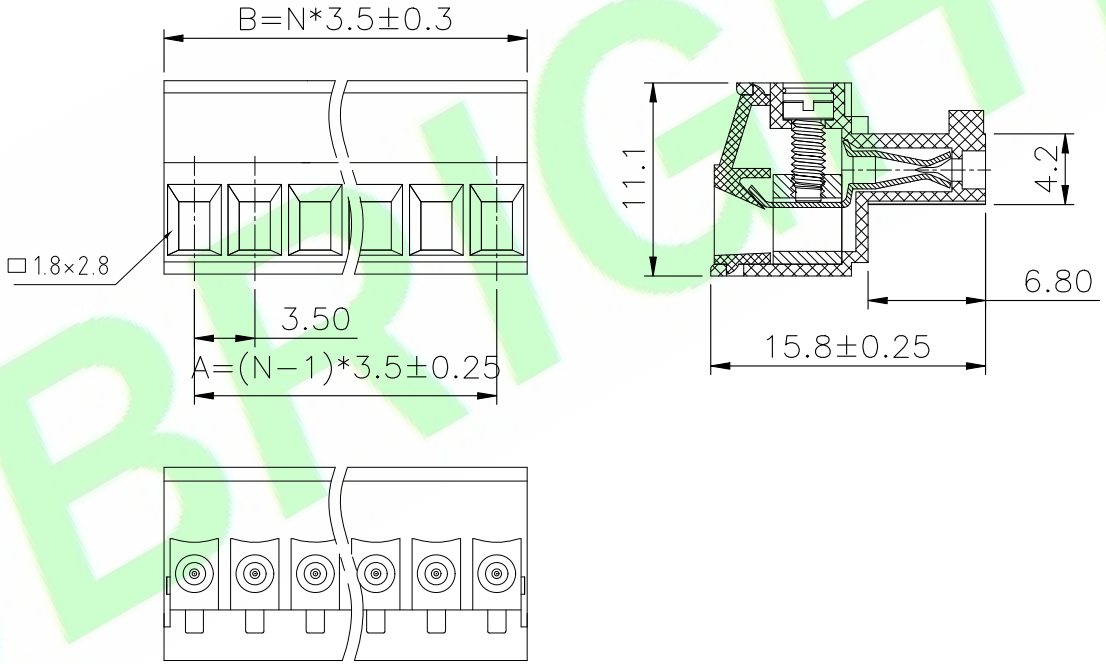

Ordering Information
15W35D1SF-XXX-01-XXX
1 23 4 5 678

1: —— Series No.
2: —— S:Straight Type
3: —— F:Female
4: —— No. of Positions
5: —— S:Matte Tin Plated
6: —— G:Green
B:Black
L:Blue
R:Red
N:Natural
O:Orange
Y:Yellow
A:Gray
P:Purple
7: —— A:In Bag
B:In Tube
C:In Tray
8: —— A:Screw "+" CR3+
B:Screw "-" CR3+

PIN	Dimension	
	A	B
2	3.5	7.0
3	7.0	10.5
4	10.5	14.0
5	14.0	17.5
6	17.5	21.0
7	21.0	24.5
8	24.5	28.0
9	28.0	31.5
10	31.5	35.0
11	35.0	38.5
12	38.5	42.0
13	42.0	45.5
14	45.5	49.0
15	49.0	52.5
16	52.5	56.0
17	56.0	59.5
18	59.5	63.0
19	63.0	66.5
20	66.5	70.0
21	70.0	73.5
22	73.5	77.0
23	77.0	80.5
24	80.5	84.0

REV.	DESCRIPTION	DR.BY	ECN. NO.
1X	ORIGINAL	Judyyan	

DR.BY.: Judyyan
CHKD.: Tony
APPD.: Billy

GENERAL TOLERANCE:

LINEAR	ANGLES
	X°: ±5.0°
>30 ±0.20	X.X°: ±3.0°
6~30 ±0.30	X.XX°: ±2.0°
0~6 ±0.10	X.XXX°: ±1.0°

PART NO : 15W35D1SF-XXX-01-XXX
DWG. NO.:
TITLE : 3.50mm Pitch Straight Type Female Terminal Block(02~24P)
DATE: 2-Mar-2024

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm
THIRD ANGLE PROJECTION
A4

HJBRIGHT®