

Specifications:

Material And Finish:

Insulator:Polyamide (Glass filled)UL94V-0 Color:Green

Contact:Copper Alloy

Plated:See Ordering Information

Wire Range:16-26AWG

Rating:

Current Rating:10.0 Amps/way max





Voltage Rating:300V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Withstanding Voltage:2500V AC/Minute

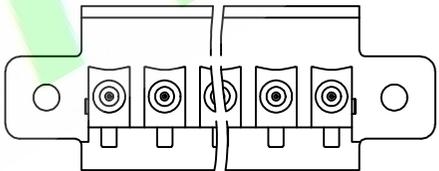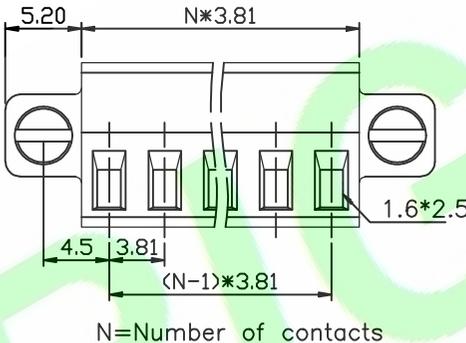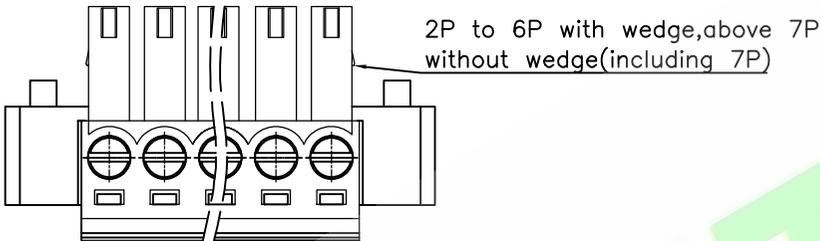

Ordering Information

15W381D1SF-XXX-02-X
 1 23 4 5 6

- 1: — Series No.
- 2: — S: Straight Type
- 3: — F: Female
- 4: — No. of Positions
- 5: — Q: Tin Plated
- 6: — A: In Bag
 B: In Tube
 C: In Tray

DR.BY: Zolin		GENERAL TOLERANCE:		PART NO : 15W381D1SF-XXX-02-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
CHKD.: Sam		LINEAR		DWG. NO.: DZT381S-XXXF-02-X			
APPD.: Billy		X: ±5.0°		TITLE : 3.81mm Pitch Connector Straight Type		SHEET: 1/1	
REVISION		6~30 ±0.30		DATE: 30-Jan-2025		SCALE: 1:1	
DESCRIPTION		0~6 ±0.10		UNIT: mm		THIRD ANGLE PROJECTION	
ECN. NO.		X.XX: ±2.0°				A4	
		X.XXX: ±1.0°					