

Specifications:

Material And Finish:

Insulator:PA9T UL94V-0 Color:Black

Contact:CuMg0.1

Plated:See Ordering Information

Rating:

Current Rating:2.5 Amp

Operating Temperature

Range:-40°~+170°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

18011RA-04S207-G

1 2 3 4 5








1:— Series No.

2:— M:SMT Type



3:— No. of Positions

4:— S:Matte Tin Plated

5:— G:Tape&Reel

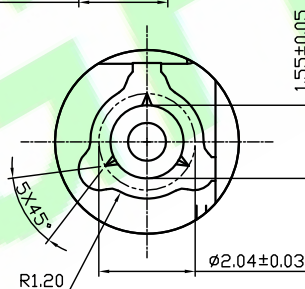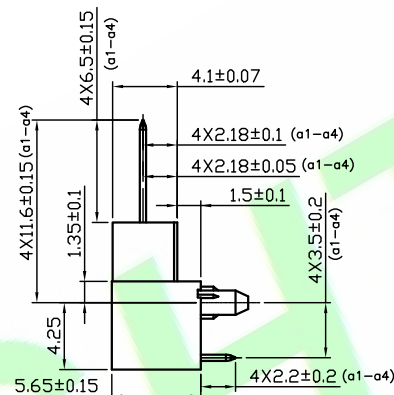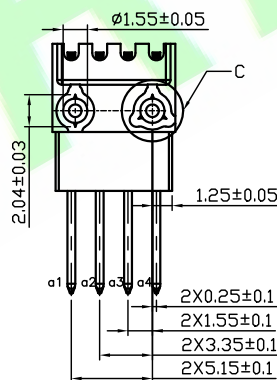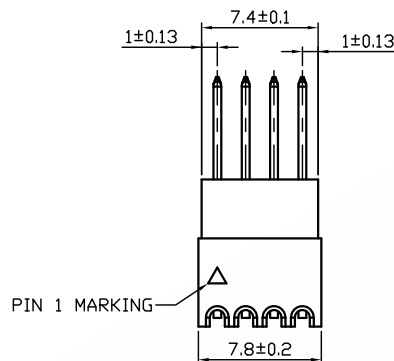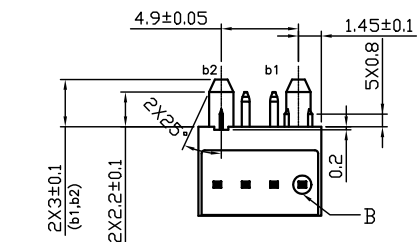

Detail C
3:1

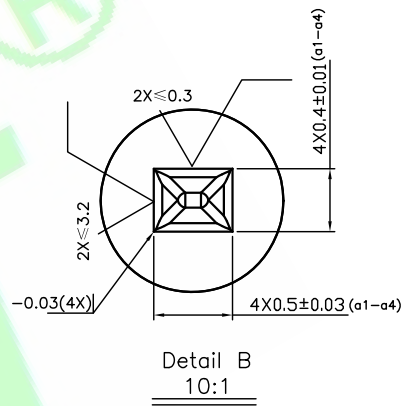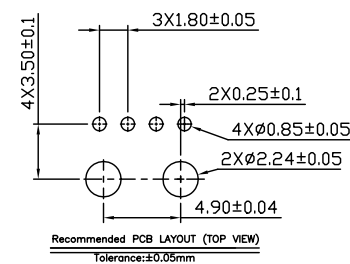

RoHS Compliant
Automobile
Product

5X				DR.BY.: Zolin	GENERAL TOLERANCE:		PART NO : 18011RA-04S207-G		HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
4X					LINEAR		ANGLES					DWG. NO.:	
3X				CHKD.: Hu.CH	X.:	X':	±5.0°		TITLE : 4PIN Single Row 1.8 Pitch R/A Header	SHEET:	1/1		A4
2X					X.X:	±0.40	X.X':	±3.0°		SCALE:	1:1		
1X	ORIGINAL	Zolin		APPD.: Billy	X.XX:	±0.25	X.XX':	±2.0°		UNIT:	mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX:	±0.15	X.XXX':	±1.0°	DATE: 08-Mar-2024				