

Specifications:

Material And Finish:




Insulator:PA6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp
 Voltage Rating:150V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

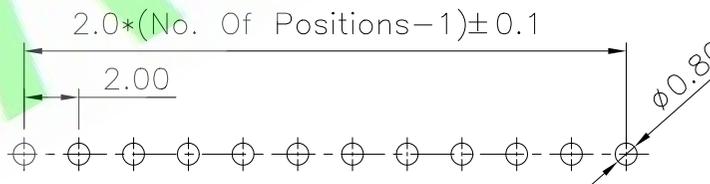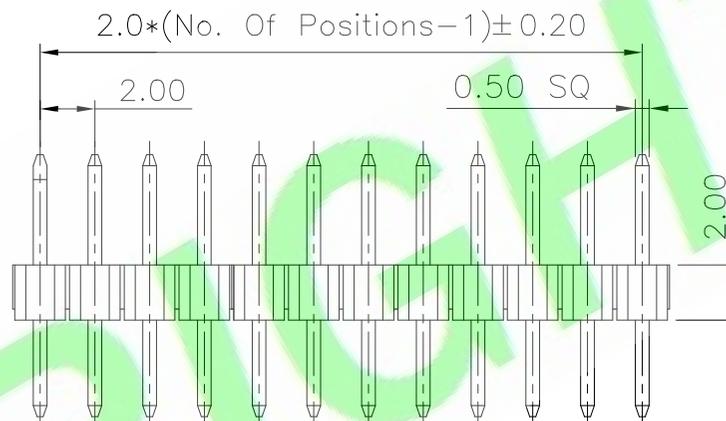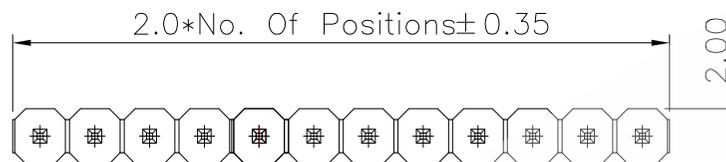

Recommended PCB Layout
 (Tolerance: ± 0.05)

Ordering Information

20011S-XXX088-NX

1 2 3 4 5

- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — A: Gold Flash
Q: Tin Plated
H: Selective Gold Plated
- 5: — A: In Bag

DR.BY.: XQR	GENERAL TOLERANCE:		PART NO : 20011S-XXX088-NX	
CHKD.: Judyyan	LINEAR	ANGLES	DWG. No.:	
APPD.: Billy	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Pin Header Straight Type	
ECN. NO.	x.x: ±0.20	x.x': ±3.0°	DATE: 17-Dec-2025	
	x.xx: ±0.15	x.xx': ±2.0°		
	x.xxx: ±0.10	x.xxx': ±1.0°		

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	xiao	
	DESCRIPTION	DR.BY	ECN. NO.