

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:5000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

200122M-XXX199-NOX

1 2 3 4 56

1:—Series No.

2:—SMT Type

3:—No. of Positions

4:—A:Gold Flash

H:Contact Plated Gold Flash;

Other area plated matte tin





T:10u" Gold on contact;Matte Tin on tail

Q:Tin Plated

5:—O:W/O Peg

6:—E:W/Cap In Tube

F:W/Cap In Tape&Reel

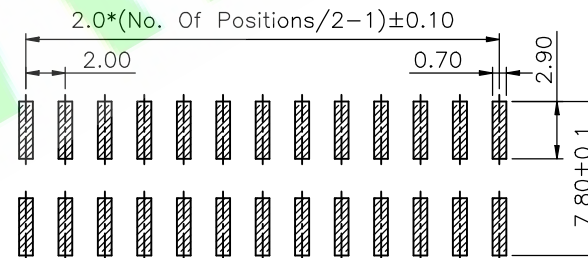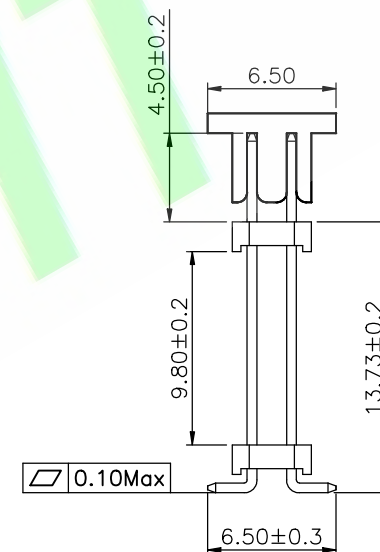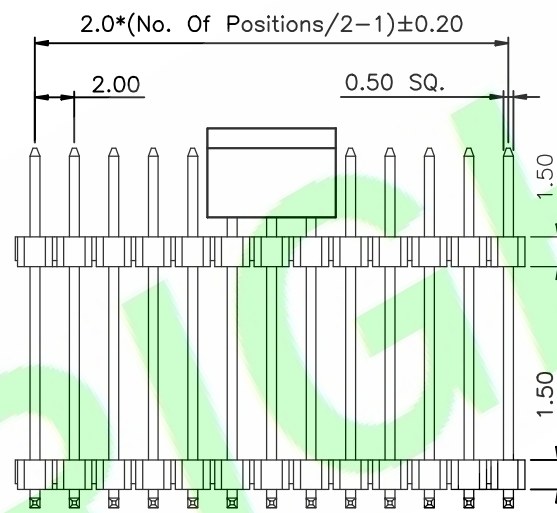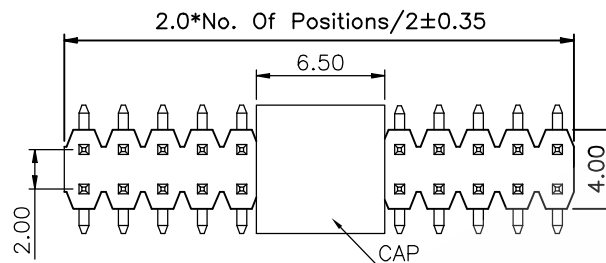

Recommended PCB Layout(Tolerance:±0.05mm)

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 200122M-XXX199-NOX	
	LINEAR	ANGLES	DWG. NO.:	
CHKD.: Tony	X.: ±0.30	X': ±5.0°	TITLE : 2.0mm Pitch Pin Header SMT Type	
	X.X: ±0.20	X.X': ±3.0°		
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 2-Feb-2026	
	X.XXX: ±0.10	X.XXX': ±1.0°		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	ECN. NO.
REV.	DESCRIPTION	DR.BY	