

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:BRASS

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC




Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

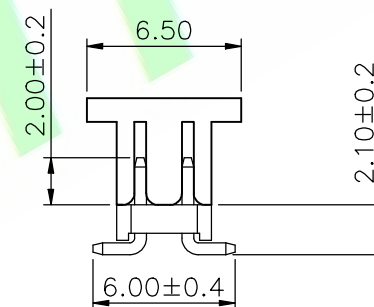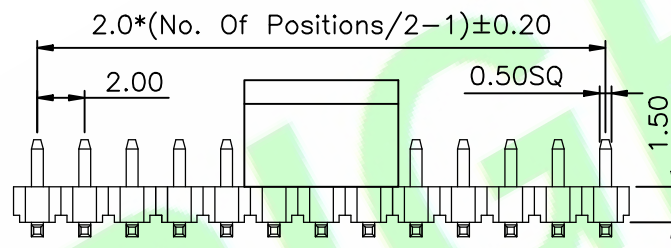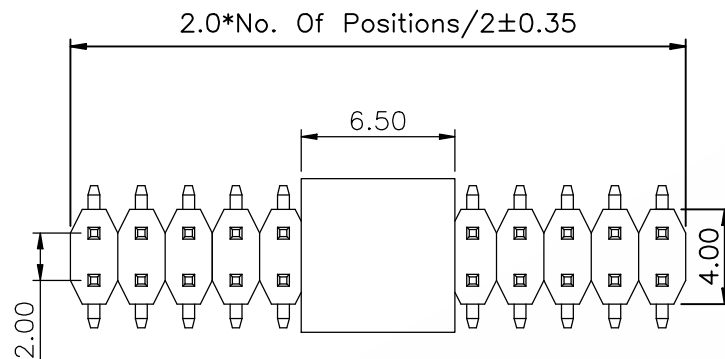


Ordering Information

20012M-XXX055-NX

1 2 3 4 5


- 1:— Series No.
2:— S:Straight Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

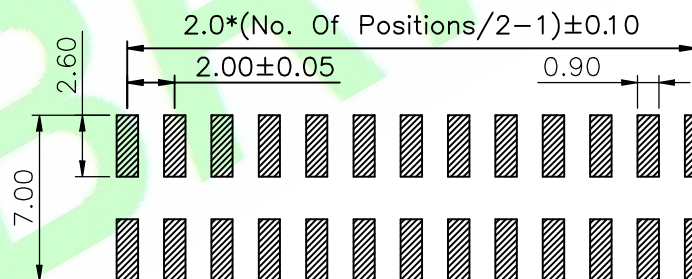

Recommended PCB Layout

1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 20012M-XXX055-NX
	LINEAR	ANGLES	
CHKD.: Tony	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	TITLE : 2.0mm Pitch Pin Header SMT Type
	X.XXX: ±0.10	X.XXX': ±1.0°	
			DATE: 25-Dec-2014

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
SHEET: 1/1			A4
SCALE: 1:1			
UNIT: mm			
		THIRD ANGLE PROJECTION	