

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black
Contact:BRASS

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC




Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

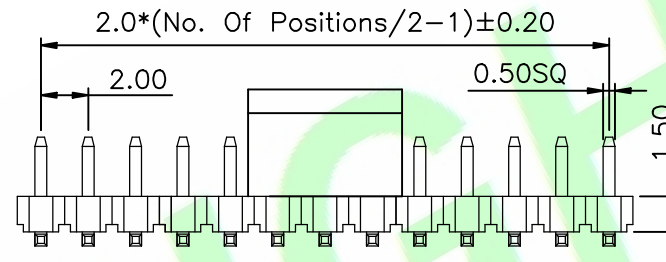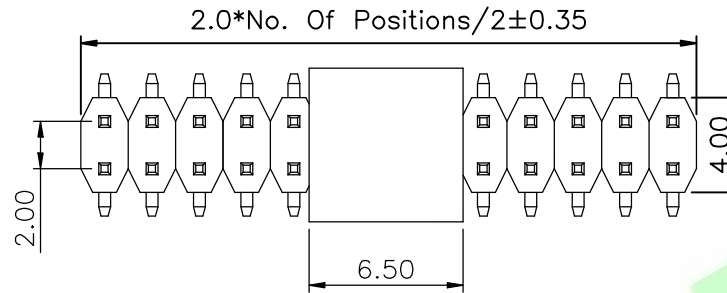


Ordering Information

20012M-XXX060-NX

1 2 3 4 5

- 1:—Series No.
2:—S:Straight Type
3:—No. of Positions
4:—A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:—A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

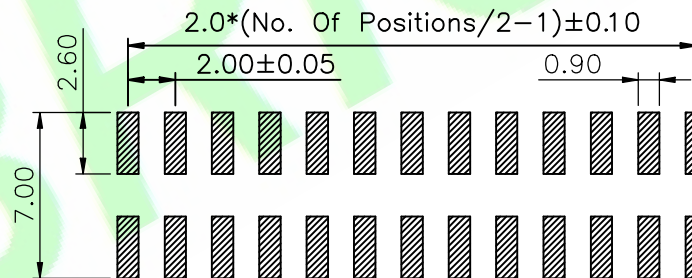

Recommended PCB Layout

1X REV. ORIGINAL DESCRIPTION Judyyan DR.BY ECN. NO.				DR.BY.: Judyyan		GENERAL TOLERANCE:		PART NO : 20012M-XXX060-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
				CHKD.: Hu. ch		LINEAR		ANGLES					
				APPD.: Billy		x.: ±0.30		x': ±5.0°		TITLE : 2.0mm Pitch Pin Header SMT Type			
						x.x: ±0.20		x.x': ±3.0°					
						x.xx: ±0.15		x.xx': ±2.0°					
		x.xxx: ±0.10		x.xxx': ±1.0°		DATE: 30-Jun-2025		SHEET: 1/1		 THIRD ANGLE PROJECTION		A4	
						SCALE: 1:1							
						UNIT: mm							

1

2

3

4

5

6

7

8