

RoHS Compliant



Specifications:

Material And Finish:

Insulator:Nylon 9T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

20013H-03S197-G

1 2 3 4 5



1:—Series No.

2:—H: Straight SMT Type

3:—No. of Positions

4:—S: Matte Tin Plated

5:—G: W/O Cap In Tape & Reel

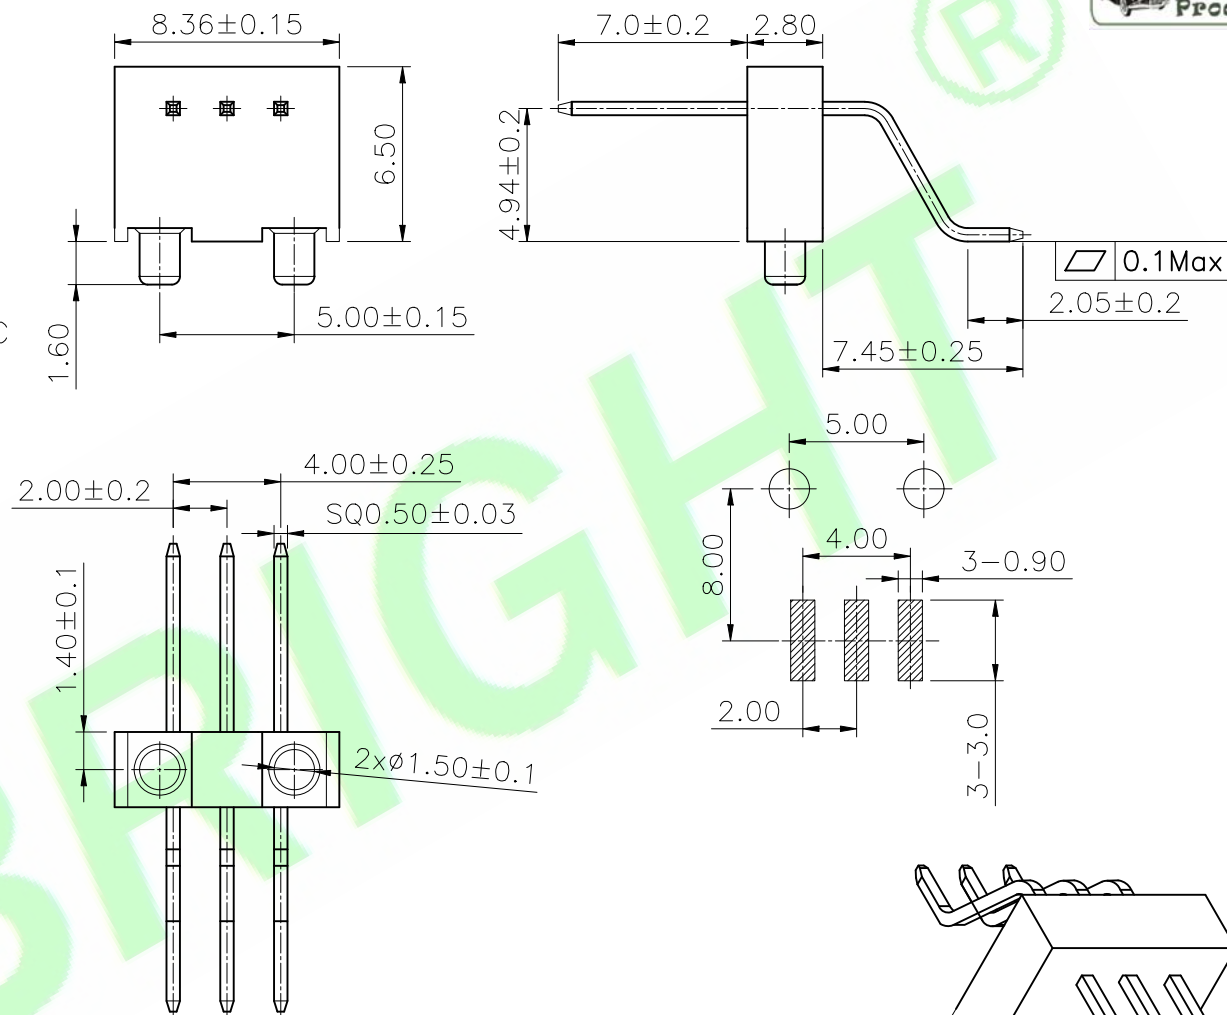

1X		ORIGINAL	Bin	ECN. NO.	DR.BY	APPD.: Billy	GENERAL TOLERANCE:		PART NO : 20013H-03S197-G	DWG. NO.:	TITLE : 2.0mm Pitch Pin Header Straight SMT Type	DATE: 30-May-2025	HJBRIGHT® 東莞市華晶電子有限公司 BRIGEE-E ELECTRONIC TECHNOLOGY LIMITED	SHEET: 1/1 SCALE: 1:1 UNIT: mm	THIRD ANGLE PROJECTION	A4
REV.		DESCRIPTION	DR.BY				LINEAR	ANGLES								
	1		2		3		X: ±0.30	X': ±5.0°								
							X.X: ±0.20	X.X': ±3.0°								
							X.XX: ±0.15	X.XX': ±2.0°								
							X.XXX: ±0.10	X.XXX': ±1.0°								