

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

200212S-XXX210-NX

1 2 3 4 5

1: — Series No.

2: — S: Straight Type





3: — No. of Positions(01-40)

4: — A: Gold Flash

Q: Tin Plated

S: Matte Tin Plated

5: — A: In bag

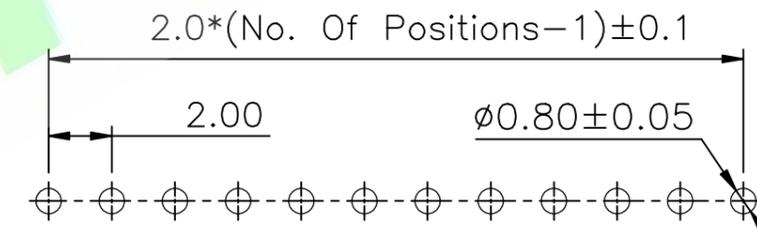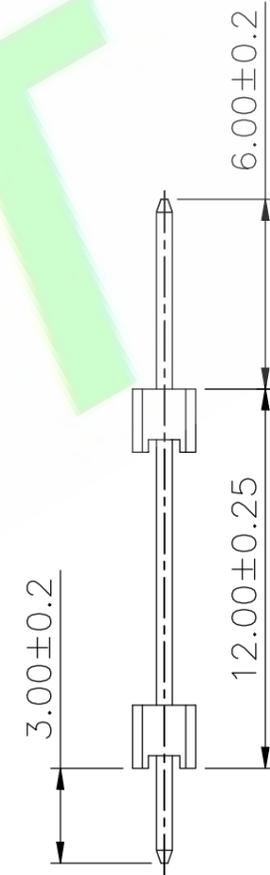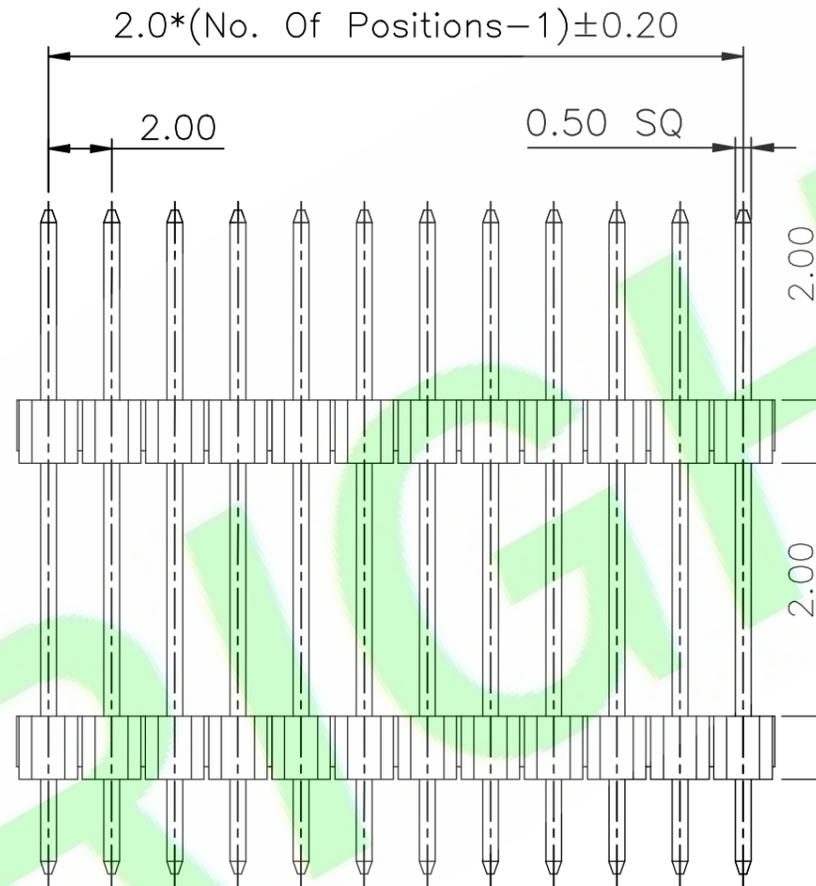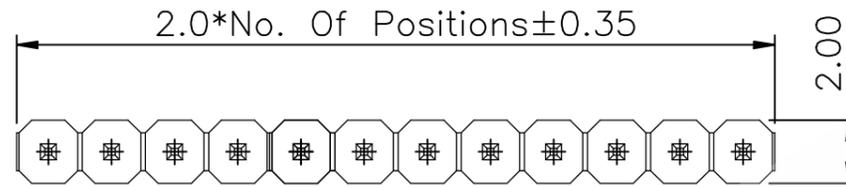

Recommended PCB Layout

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 200212S-XXX210-NX	
CHKD.: Hu.ch	LINEAR	ANGLES	DWG. NO.:	
APPD.: Billy	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Pin Header Straight Type	
ECN. NO.	x.x: ±0.20	x.x': ±3.0°	DATE: 25-Nov-2025	
	x.xx: ±0.15	x.xx': ±2.0°		
	x.xxx: ±0.10	x.xxx': ±1.0°		

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm

THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

1 2 3 4 5 6 7 8