

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max




Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information


20021S-XXX088A-NX

- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5: — A: In Bag
B: In Tube
C: In Tray

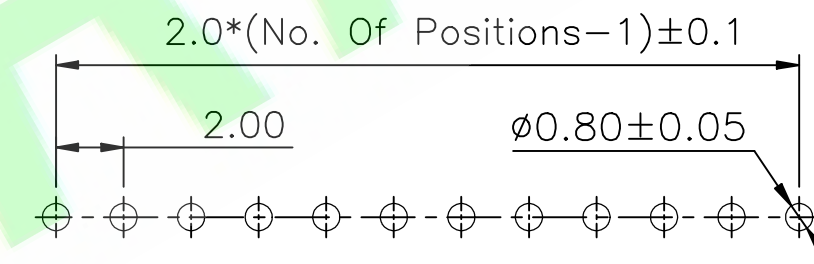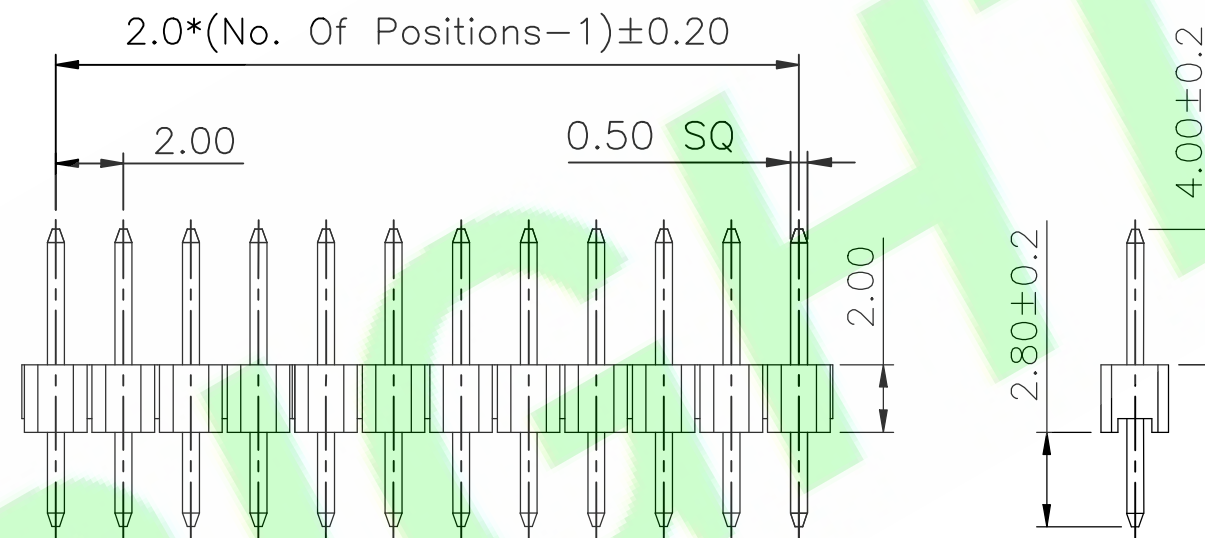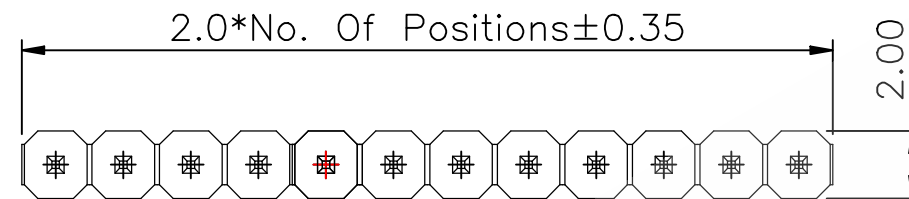

Recommended PCB Layout

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 20021S-XXX088A-NX	HJBRIGHT[®] 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
	LINEAR	ANGLES	DWG. NO.:				
CHKD.: Hu.ch	x.: ±0.30	x*: ±5.0°	TITLE : 2.0mm Pitch Pin Header Straight Type	SHEET: 1/1		 THIRD ANGLE PROJECTION	A4
	x.x: ±0.20	x.x*: ±3.0°		SCALE: 1:1			
APPD.: Billy	x.xx: ±0.15	x.xx*: ±2.0°		UNIT: mm			
	x.xxx: ±0.10	x.xxx*: ±1.0°	DATE: 11-May-2022				

A4