

RoHS Compliant

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC





Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

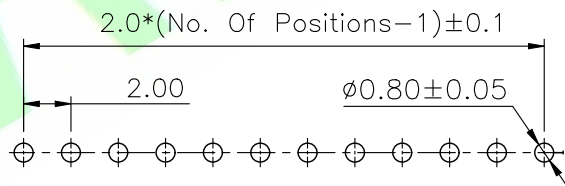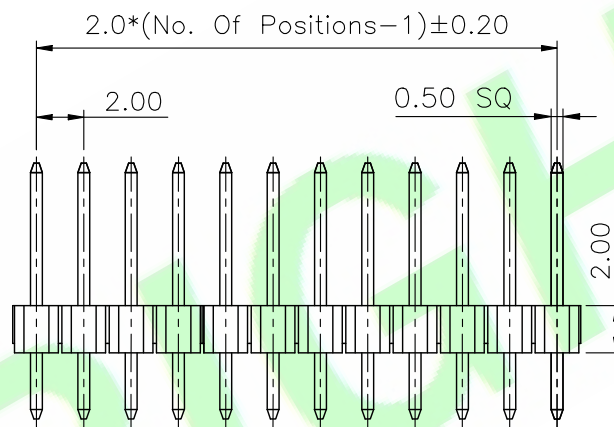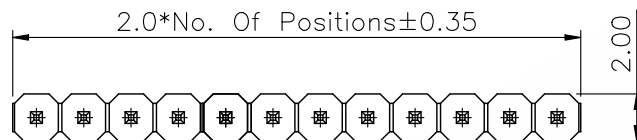


Recommended PCB Layout

Ordering Information

20021S-XXX108A-NX

1 2 3 4 5

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
H: Selective Gold Plated
Q: Tin Plated
5:— A: In Bag
B: In Tube
C: In Tray

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 20021S-XXX108A-NX	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
	LINEAR	ANGLES				
CHKD.: Hu.ch	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Pin Header Straight Type	SHEET: 1/1		A4
	x.x: ±0.20	x.x': ±3.0°		SCALE: 1:1		
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°		UNIT: mm		
	x.xxx: ±0.10	x.xxx': ±1.0°		DATE: 23-Jul-2026		

1X	ORIGINAL	Judyyan	ECN. NO.
REV.	DESCRIPTION	DR.BY.	

A4