

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information

200222M-XXX172-XX

1 2 3 4 5 6

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
S:Matte Tin Plated
5: — 0:Without Peg
1:With Peg
6: — A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

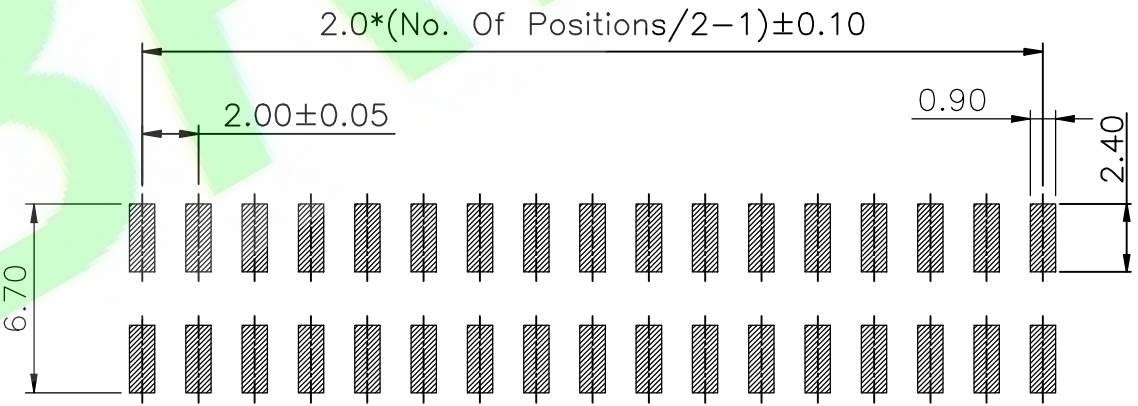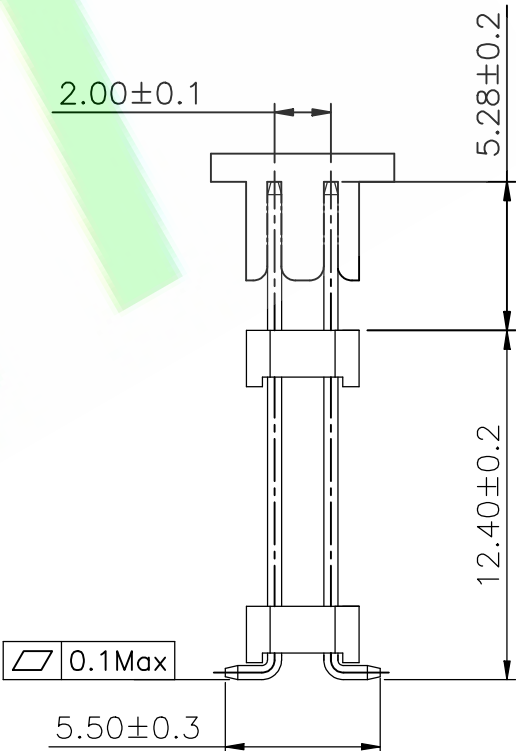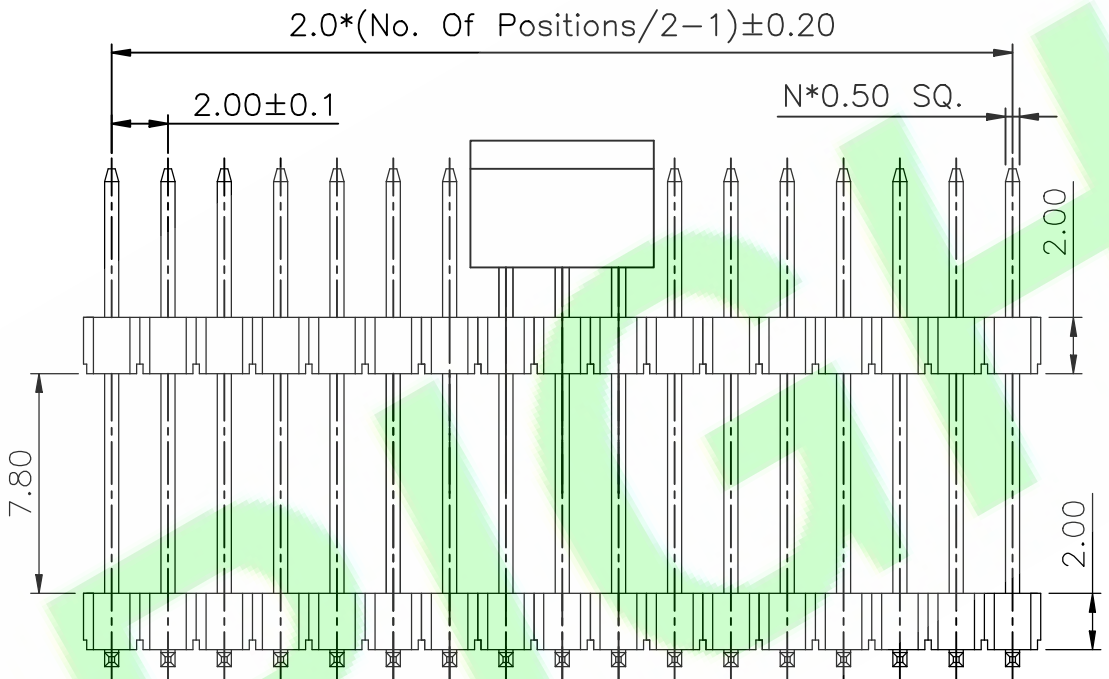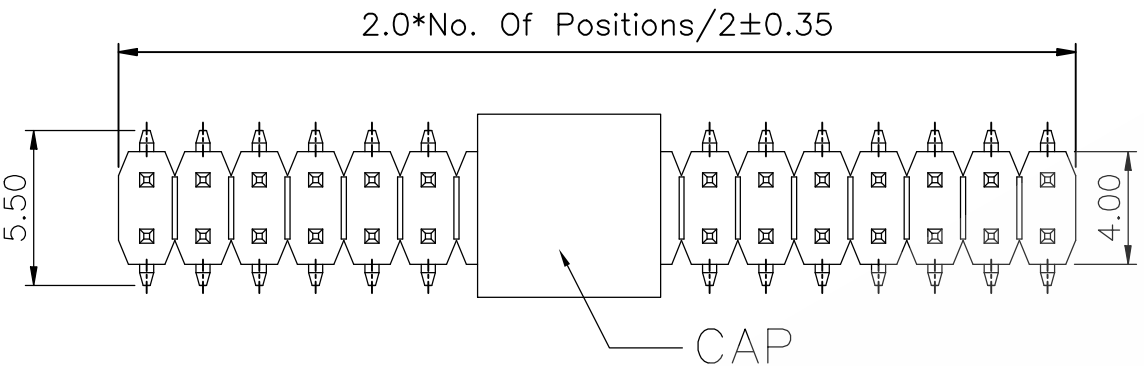


Recommended PCB Layout

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 200222M-XXX172-XX
	LINEAR	ANGLES	
CHKD.: Tony	x.: ±0.30	x': ±5.0°	DWG. NO.:
	x.x: ±0.20	x.x': ±3.0°	
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	TITLE : 2.0mm Pitch Pin Header SMT Type
	x.xxx: ±0.10	x.xxx': ±1.0°	
		DATE: 24-Nov-2025	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.