







Specifications:
 Material And Finish:
 Insulator:PA6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:
 Current Rating:2.0 Amp
 Voltage Rating:150V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information
 20022M-16X082-1F-NB

- 1: Series No.
- 2: M:SMT Type
- 3: No. of Positions
- 4: A:Gold Flash
Q: Tin Pated
- 5: Peg(0:W/O Peg 1:W/1Peg)
- 6: F:W/Cap In Tape&Reel
- 7: N:PA6T
- 8: B:Black

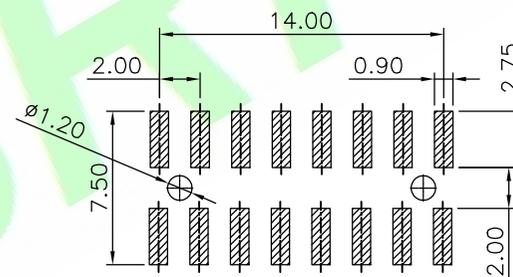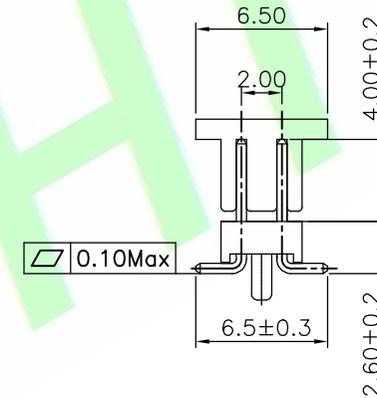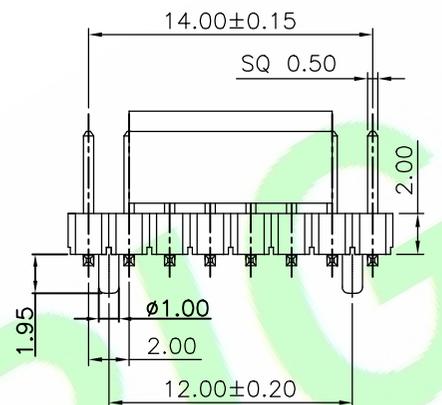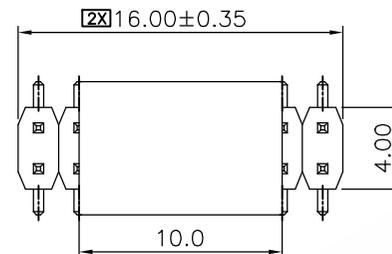

Recommended PCB Layout

1X	修正产品总长: 由10.00变更为16.00	Judyyan	20241223
1X	ORIGINAL	Anne	
REV.	DESCRIPTION	DR.BY	ECN. NO

DR.BY.: Anne	GENERAL TOLERANCE:		PART NO : 20022M-16X082-1F-NB
CHKD.: Judyyan	LINEAR	ANGLES	DWG. NO.:
APPD.: Billy	x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Pin Header SMT Type
	x.x: ±0.20	x.x': ±3.0°	DATE: 28-Nov-2024
	x.xx: ±0.15	x.xxx: ±2.0°	
	x.xxx: ±0.10	x.xxxx: ±1.0°	

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1		A4
SCALE: 1:1		
UNIT: mm		