

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

20022M-30X064-X-E16

1 2 3 4 5 6

1:— Series No.

2:— M:SMT Type

3:— No. of Positions

4:— A:Gold Flash

Q:Tin Plated

S:Matte Tin Plated






H:Gold flash Contact;Tin on tial

5:— B:In Tube

E:W/Cap In Tube

F:W/Cap In Tape&Reel

6:— Empty 16PIN

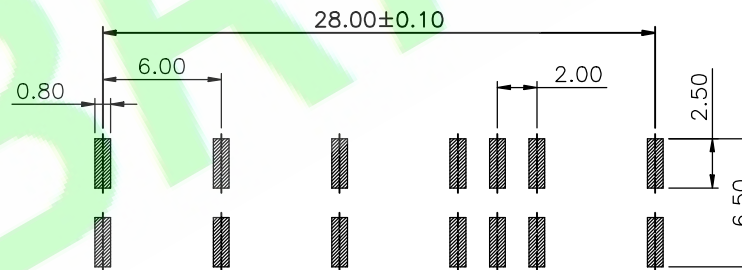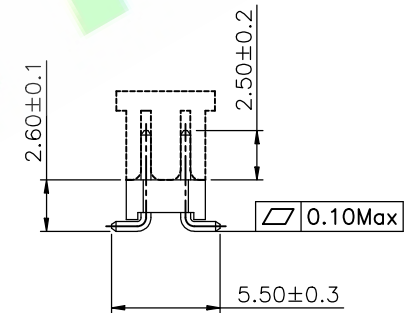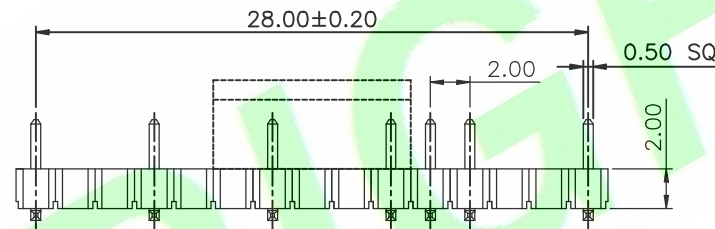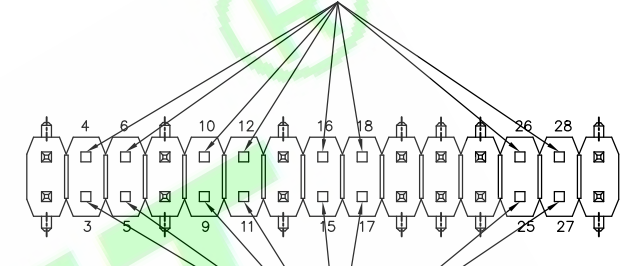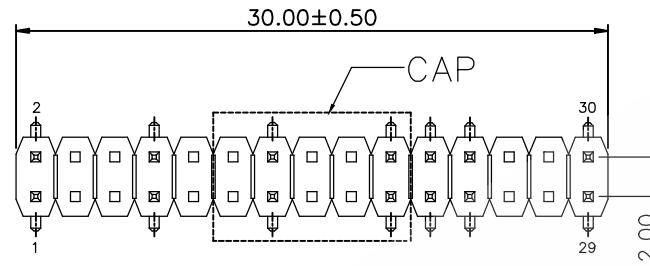


Recommended PCB Layout

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 20022M-30X064-X-E16
	LINEAR	ANGLES	
CHKD.: Tony	x.: ±0.30	x': ±5.0°	DWG. NO.:
	x.x: ±0.20	x.x': ±3.0°	TITLE : 2.0mm Pitch Pin Header SMT Type Empty 16PIN
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	
	x.xxx: ±0.10	x.xxx': ±1.0°	

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4