

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

20022M-XXX060-XX

1 2 3 4 56

1:— Series No.

2:— M:SMT Type

3:— No. of Positions

4:— A:Gold Flash

H:Selective Gold Plated

Q:Tin Plated

5:— 0:Without Peg

1:With Peg




6:— A:In bag

B:In Tube


C:In Tray

E:W/Cap In Tube


F:W/Cap In Tape&Reel

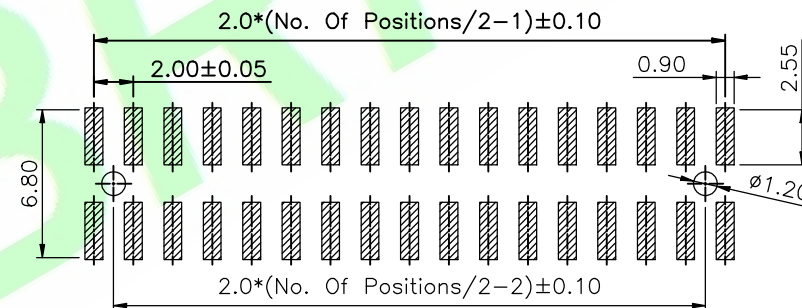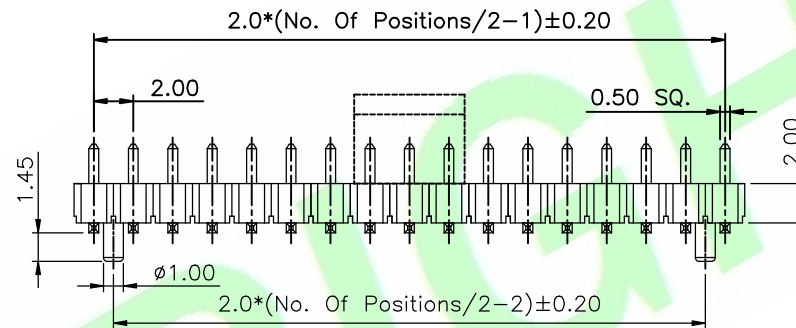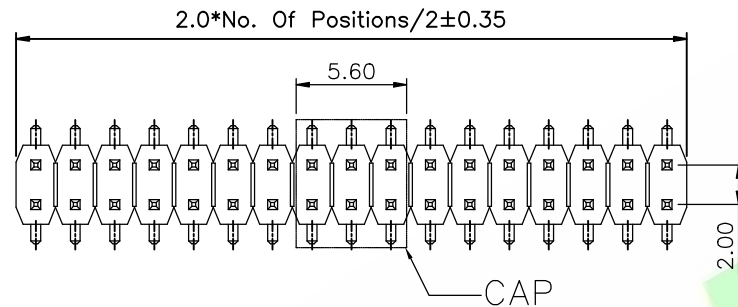

Recommended PCB Layout



0:Without Peg

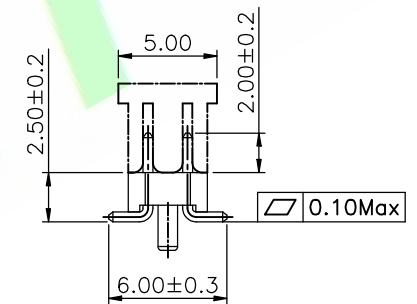

1:With Peg

1X	ORIGINAL	Samson
REV.	DESCRIPTION	DR.BY


DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : 20022M-XXX060-XX
	LINEAR	ANGLES	
	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
CHKD.: Tony	X.XX: ±0.15	X.XX': ±2.0°	TITLE : 2.0mm Pitch Pin Header SMT Type
APPD.: Billy	X.XXX: ±0.10	X.XXX': ±1.0°	
			DATE: 29-May-2014

HJBRIGHT 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4