

Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\sim+105^{\circ}\text{C}$



Withstanding Voltage:500V AC/Minute

20022M-XXX064-X

$$\begin{array}{ccccc} \overline{\overline{1}} & \overline{\overline{2}} & \overline{\overline{3}} & \overline{\overline{4}} & \overline{\overline{5}} \end{array}$$

H:Gold flash Contact;Tin on tial

F:W/Cap In Tape&Reel

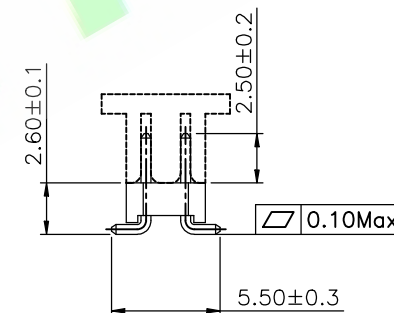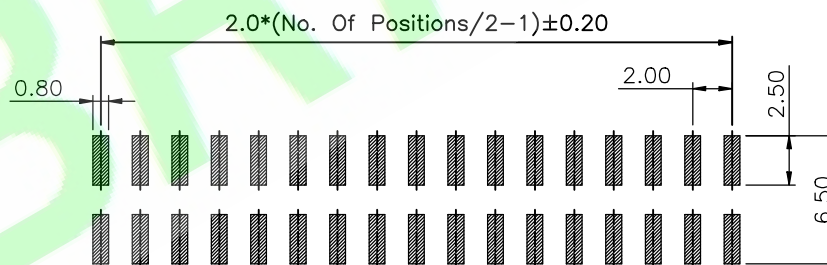

Recommended PCB Layout

				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 20022M-XXX064-X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
					LINEAR	ANGLES	DWG. NO.:					
				CHKD.: Tony	x.: ±0.30	x': ±5.0"	TITLE : 2.0mm Pitch Pin Header SMT Type Empty		SHEET: 1/1			A4
					x.x: ±0.20	x.x': ±3.0"			SCALE: 1:1			
				APPD.: Billy	x.xx: ±0.15	x.xxx: ±2.0"			UNIT: mm			
1X	ORIGINAL	Judyyan			x.xxx: ±0.10	x.xxx': ±1.0"	DATE: 15-Dec-2025					
REV.	DESCRIPTION	DR.BY	ECN. NO.									