

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

20022M-XXX082-NX

1 2 3 4 5

1: — Series No.

2: — M:SMT Type

3: — No. of Positions

4: — A:Gold Flash





H:Selective Gold Plated

Q:Tin Plated

5: — B:In Tube

E:W/Cap In Tube

F:W/Cap In Tape&Reel

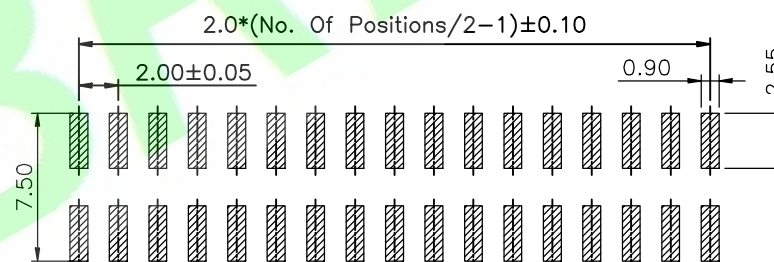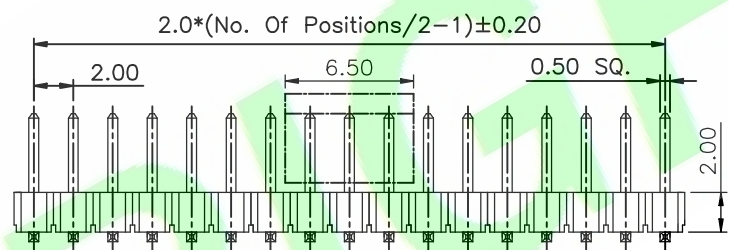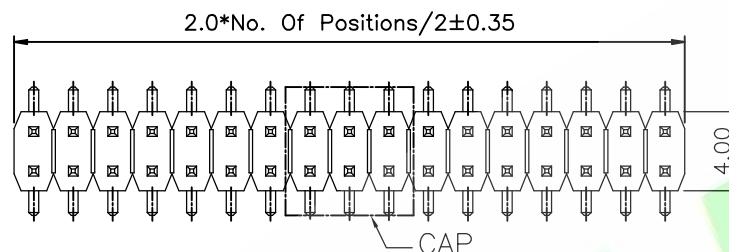

Recommended PCB Layout

				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 20022M-XXX082-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
				CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:				
					x.: ±0.30	x': ±5.0°	TITLE : 2.0mm Pitch Pin Header SMT Type				
					x.x: ±0.20	x.x': ±3.0°					
1X	ORIGINAL	Judyyan		APPD.: Billy	x.xx: ±0.15	x.xxx: ±2.0°	DATE: 7-Jan-2026		SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°			SCALE: 1:1		
							UNIT: mm	THIRD ANGLE PROJECTION			