

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

20022M-XXX088-XX

1 2 3 4 5 6

1:— Series No.

2:— M:SMT Type

3:— No. of Positions

4:— A:Gold Flash

H:Selective Gold Plated

Q:Tin Plated

5:— 0:Without Peg

1:With Peg



6:— A:In bag

B:In Tube


C:In Tray

E:W/Cap In Tube

F:W/Cap In Tape&Reel

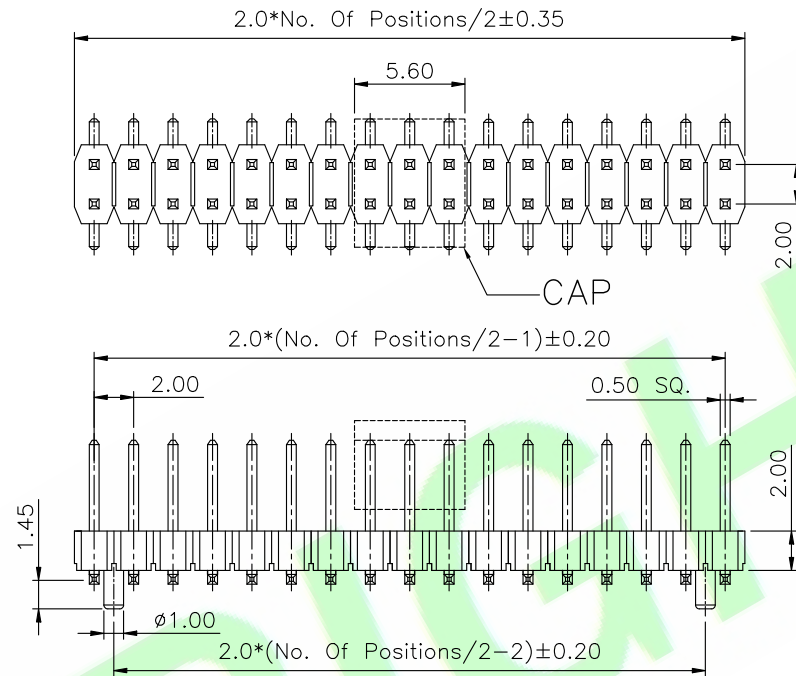

1:With Peg

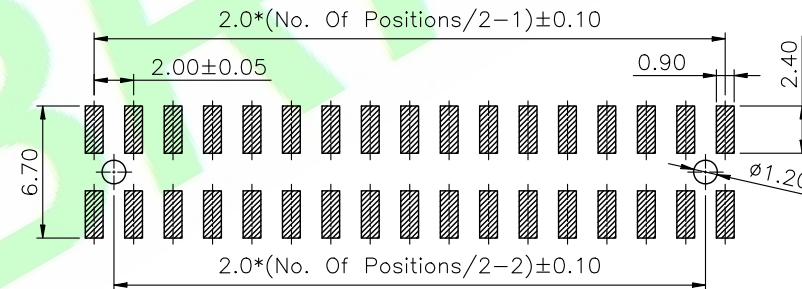


Recommended PCB Layout

1X	ORIGINAL	Judyyan	ECN. NO.
REV.	DESCRIPTION	DR.BY	

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 20022M-XXX088-XX
	LINEAR	ANGLES	
CHKD.: Tony	x.: ±0.30	x': ±5.0°	DWG. NO.:
	x.x: ±0.20	x.x': ±3.0°	
APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	TITLE : 2.0mm Pitch Pin Header SMT Type
	x.xxx: ±0.10	x.xxx': ±1.0°	
			DATE: 9-Jul-2026

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4