

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Voltage Rating:150V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.





Withstanding Voltage:500V AC/Minute

Ordering Information

20022R-XXX123-NX

1 2 3 4 5

- 1:— Series No.
2:— R/A Type
3:— No. of Positions
4:— A:Gold Flash
Q:Tin Plated
5:— A:In bag
B:In Tube
C:In Tray

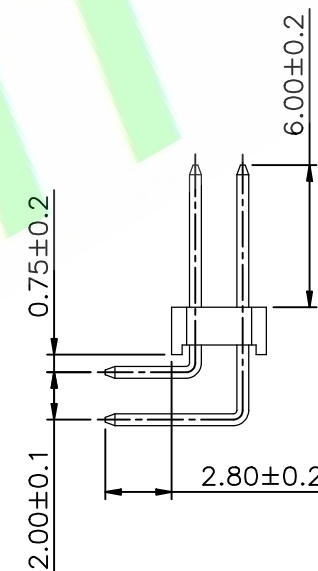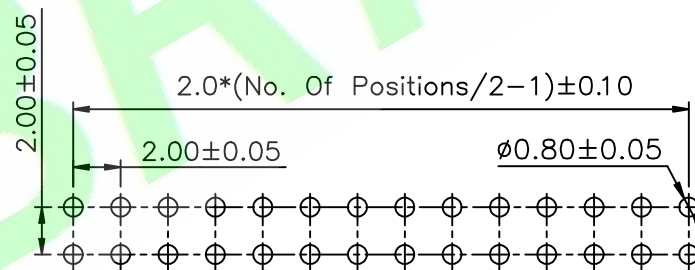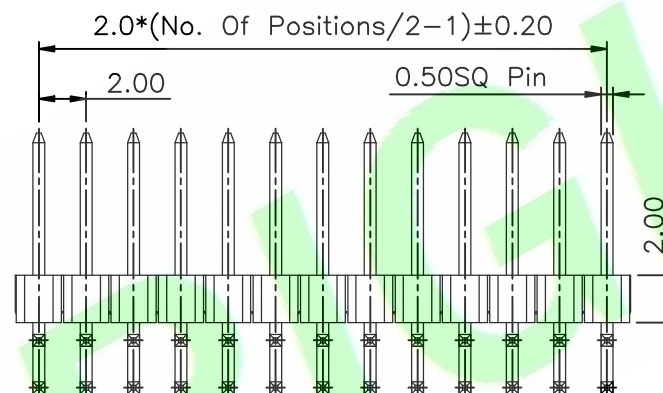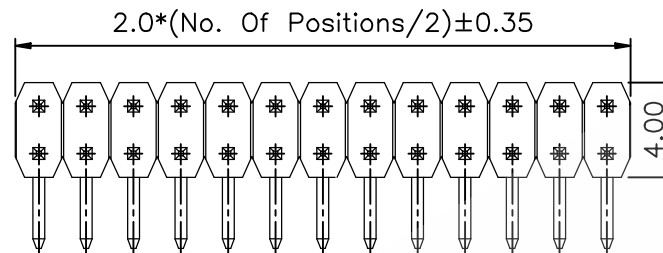

Recommended PCB Layout

				DR.BY.: Kenry		GENERAL TOLERANCE:		PART NO : 20022R-XXX123-NX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED		
						LINEAR		ANGLES				
				CHKD.: Tony		x.: ±0.30		x': ±5.0"		TITLE : 2.0mm Pitch Pin Header R/A Type		
						x.x: ±0.20		x.x': ±3.0"				
				APPD.:		x.xx: ±0.15		x.xxx: ±2.0"				
				Billy		x.xxx: ±0.10		x.xxxx: ±1.0"		DATE: 14-Jan-2014		
1X		ORIGINAL		Kenry						SHEET: 1/1		
REV.		DESCRIPTION		DR.BY		ECN. NO.				SCALE: 1:1		
1				2				3		UNIT: mm		
								4		THIRD ANGLE PROJECTION		
								5		A4		
								6				
								7				
								8				