

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:0.8 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.




Withstanding Voltage:500V AC/Minute

Ordering Information
08022M-XXX053-0X

1 2 3 4 5

- 1: — Series No.
2: — M:SMT Type
3: — No. of Positions
4: — A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5: — A:In bag
B:In Tube
F:W/Cap In Tape&Reel

Recommended PCB Layout

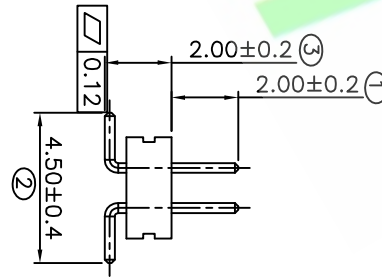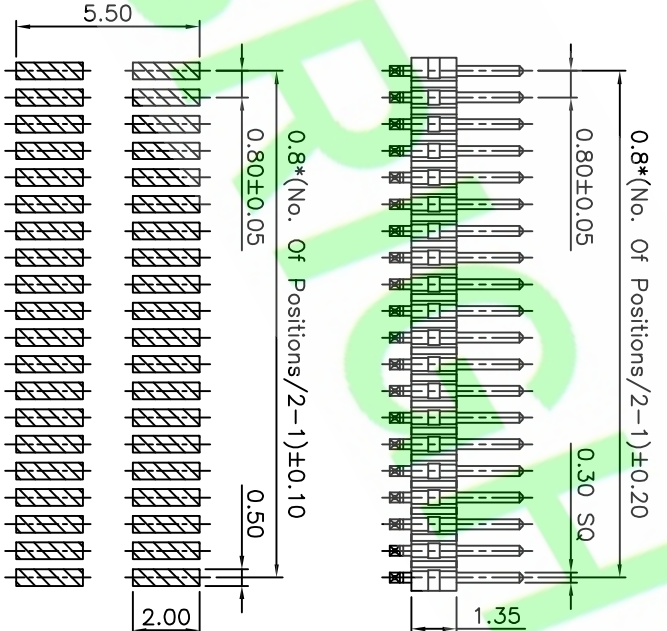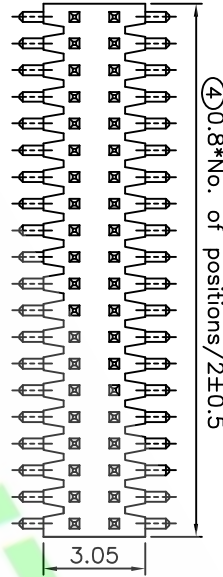

5X			DR.BY: 曾冬明	GENERAL TOLERANCE:		PART NO : 08022M-XXX053-0X	HUBRIGHT 東莞市華晶電子有限公司	
4X				LINEAR	ANGLES	DWG. NO.: RD0805-110	BRIGHE-E ELECTRONIC TECHNOLOGY LIMITED	
3X				X: ±0.30	X: ±5.0°	TITLE : 0.80mm Pitch Pin Header SMT Type	SHEET: 1/1	
2X				XX: ±0.20	XX: ±3.0°		SCALE: 1:1	
1X	ORIGINAL	joy chen		XXX: ±0.15	XXX: ±2.0°		THIRD ANGLE PROJECTION	
REV.	DESCRIPTION	DR.BY	ECN. NO.	APPD: 尹发江	XXXX: ±0.10	DATE: 24-May-2008	A4	
1	2	3	4	5	6	7	8	